




- Using CMOS IC, high reliability and stability
- Offered in a wide range of AC or DC operating voltage
- 7 timing series available (A, B, C, D, E, F, G), from 1sec to 100hrs
- Output contact 2C delay or 1C delay with 1C instantaneous can select by pushing "MODE" switch to A or B
- Bi-Color LED provides status indication for power ON and time UP
- H3M-□ can use adapter (Type Y-40) for flush mount

SPECIFICATIONS


FULL TIME RANGE		A: 1S, 10S, 1M, 10M B: 3S, 30S, 3M, 30M C: 6S, 60S, 6M, 60M D: 1M, 10M, 1H, 10H E: 3M, 30M, 3H, 30H F: 6M, 60M, 6H, 60H G: 10M, 100M, 10H, 100H			
MODEL		H3M-□		H3M-S□	
RATED VOLTAGE		DC (V): 12, 24, 48, 110 AC (V): 12, 24, 48, 110, 220, 240, 380, 415, 440 50/60Hz			
INDICATOR OPERATING		ON-Green UP-Red			
o/p C O N T A C T	MODE	mode A	mode B	mode A	mode B
	TIME LIMIT 1C		5A 250VAC Resistive Load		5A 250VAC Resistive Load
	TIME LIMIT 2C	5A 250VAC Resistive Load		5A 250VAC Resistive Load	
	INSTANTANEOUS 1C		5A 250VAC Resistive Load		5A 250VAC Resistive Load
L I F E	MECHANICAL	5×10 ⁶ times			
	ELECTRICAL	10 ⁵ times			
RESET TIME		0.1 sec max			
CONSUMED POWER		2VA			
AMBIENT TEMPERATURE		-10°C~+55°C			
AMBIENT HUMIDITY		45~85%RH			
WEIGHT		Approx. 150g		Approx. 155g	

CONNECTION DIAGRAMS & TIMING CHARTS

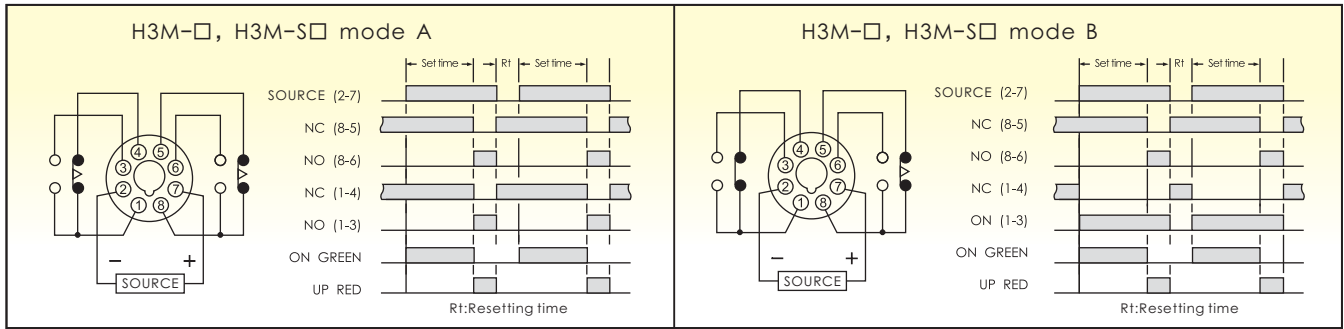


DIMENSIONS


Surface Mounting (N Type) : Using PF085A,PF085A-E Socket+SH-3 Hook

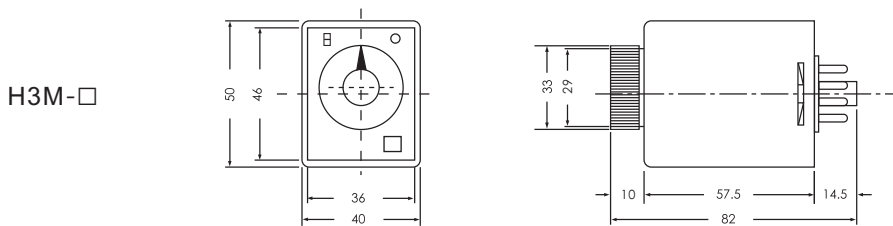

Flush Mounting (Y Type) : Using Y-40 Adapter+US-08 or P3G-08,P3G-08E Socket

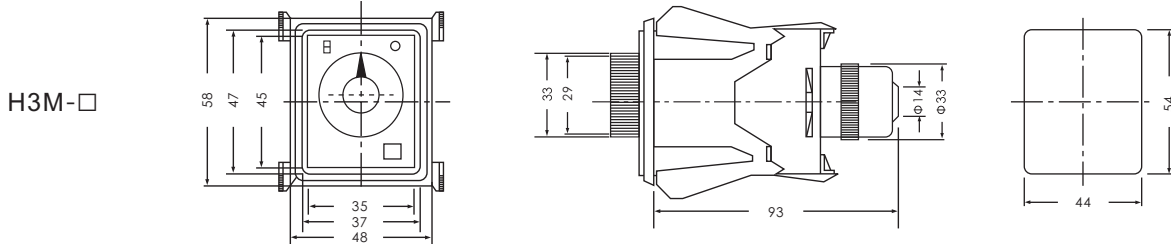

Flush Mounting (Y Type) : Using US-08 or P3G-08,P3G-08E Socket

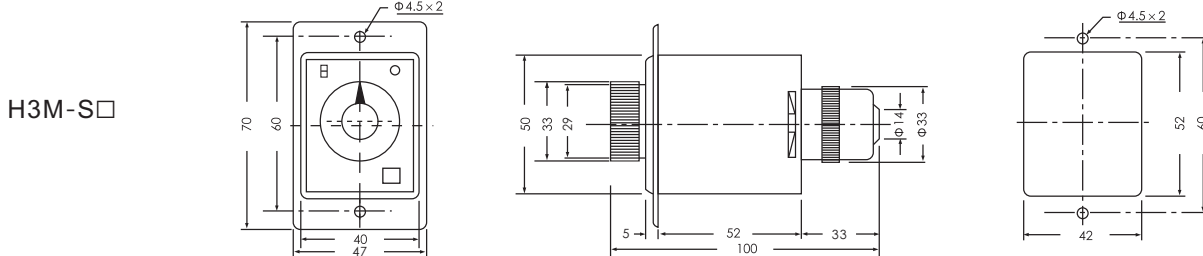

ANV ANV ANV ELECTRIC CO., LTD.

Kaohsiung Headquarter

No. 151, Jin Shan Road, Kaohsiung, Taiwan
Tel :+886 7 359 5833 Fax :+886 7 359 5822
E-Mail : anv@anv.com.tw

Taipei Office

No. 166, Fu Xing 3rd Street, Taishan Dist.,
New Taipei City, Taiwan
Tel :+886 2 2296 3133 Fax :+886 2 2296 3233
E-Mail : taipei@anv.com.tw

Tainan Office

No. 60, Lin Sen Road Sec. 1, Tainan, Taiwan
Tel:+886 6 216 0988 Fax:+886 6 216 0388
E-Mail : tainan@anv.com.tw

ANV ELECTRIC (HK) LTD

Flat 4, 14/F., Block 4, Wai Wah Centre,
Shatin, N.T., Hong Kong
Tel :+852 2690 2588 Fax :+852 2690 2511
E-Mail : anv@anv.com.hk

Taichung Office

No. 532, Wen Hsin Road Sec. 1, Taichung, Taiwan
Tel :+886 4 2320 9930 Fax :+886 4 2320 9960
E-Mail : taichung@anv.com.tw

ANV ELECTRIC (M) SDN. BHD

25-1, Jalan 1/116B, Kuchai Entrepreneur's Park,
Off Jalan Kuchai Lama, 58200 Kuala Lumpur, Malaysia
Tel :+60 3 7980 3328 Fax :+60 3 7980 3779
E-Mail : anv@anv.com.my