

BSLight





Backlit LED Panel Light



APPLICATION






Ideal for office, hotel, meeting room, hall ways warehouse, workshop and commercial or residential place.

Luminous Intensity Distribution

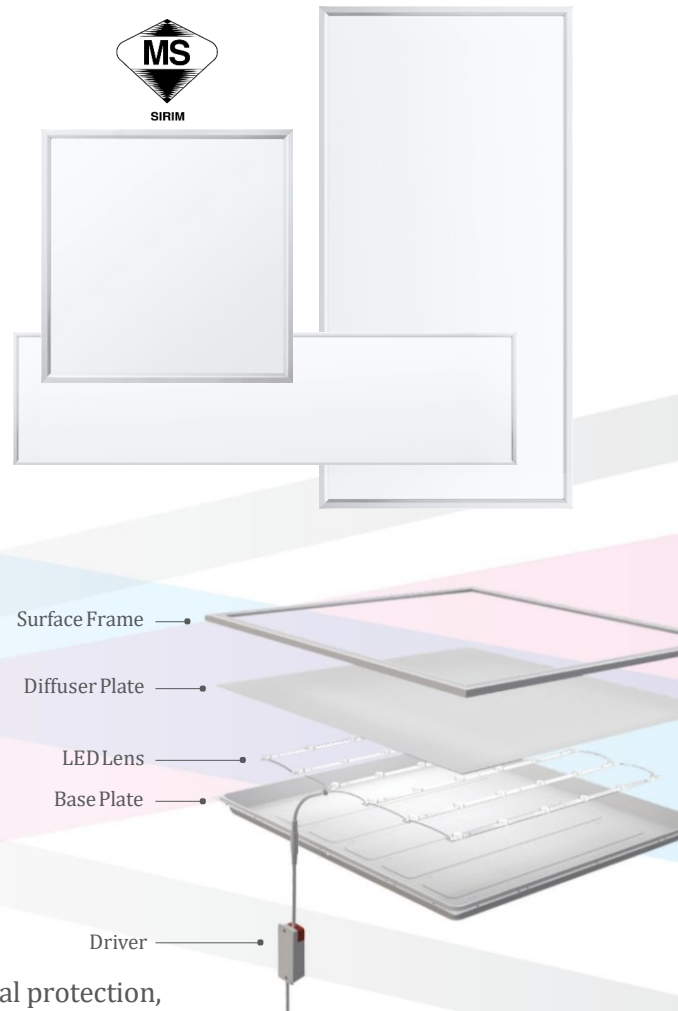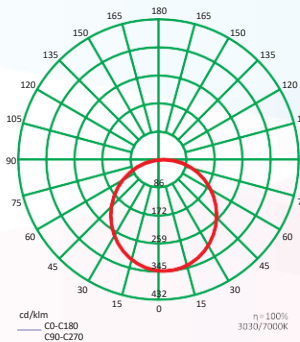

FEATURES

- Easy to install, low maintenance cost and environmental protection, directly replace the original ordinary fluorescent lamps.
- Recessed and surface mounted options available.

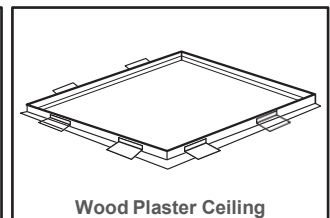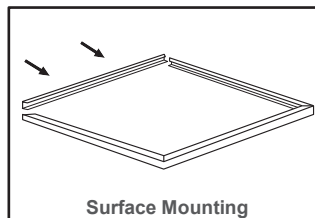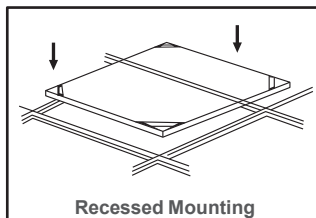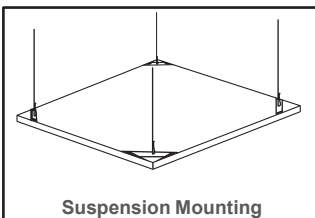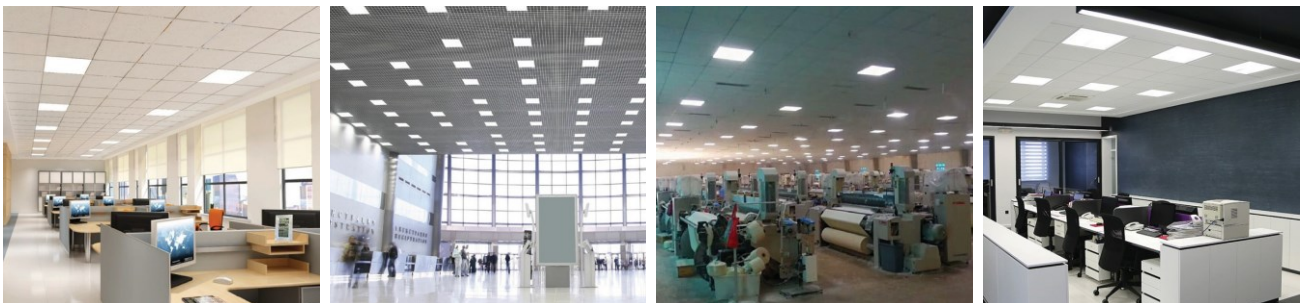

Model	Power (W)	Input Voltage	CCT (K)	Lumen (lm)	PF	Life Time	Size-L/W/H (mm)	Packing
BSBL1448MM	48W	110-265V	4000/6500	4400/4800	0.5	40,000H	295x1195x30	6/CTN
BSBL2248MM	48W	110-265V	4000/6500	4400/4800	0.5	40,000H	595x595x25	10/CTN
BSBL2480MM	80W	110-265V	4000/6500	7600/8400	0.5	40,000H	595x1195x30	6/CTN
BSBL2248	48W	110-265V	4000/6500	4400/4800	0.5	40,000H	600x600x25	10/CTN
BSBL2480	80W	110-265V	4000/6500	7600/8400	0.5	40,000H	603x1213x30	6/CTN

Remark *: Optional to upgrade the PF0.95 power factor driver.