




LED Solar Flood Light
120/200/300/400W
Radar Mode Sensor

APPLICATION
 Parking Areas, Stadiums, Pathway,
 Garden, Commercial and
 Residential Areas.

- FEATURES**
- Easy to install, no complicated wiring required.
 - Solar charging time 8 hours.
 - Working time 10 - 12 hours.
 - There is a light indicating the remaining battery.
 - Remote control adjust the brightness as needed remote control distance of 8 meters.
 - The remote can set the timer to turn mode automatically, there are 3 hours, 5 hours & 8 hours.
 - IP66 waterproof and rainproof.

- LUMINAIRE SPECIFICATION**
- Color Temperature : 6500K Day Light & 3000K Warm White
 - Color Rendering Index : ≥ 80
 - Lifetime : 30,000Hrs
 - Beam Angle : 90°
 - Voltage : DC 3.2V
 - Working Environment : $-10^\circ\text{C} \sim 40^\circ\text{C}$
 - Material : Cast Iron + PC
 - Battery Type : Lithium-ion
 - SolarPanel Cable Length : 4 meters

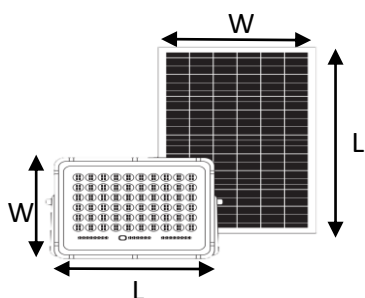

Model	Power (W)	CCT (K)	Lumen (lm)	Battery Capacity	Solar Panel (L x W x H)mm	Lamp Size (L x W x H)mm	Net Weight	Packing
BSSLFL-120	*120W	3000/6500	1200	10Ah	350 x 235 x 17	215 x 165 x 30	2.0kg	5/CTN
BSSLFL-200	*200W	3000/6500	2000	15Ah	350 x 290 x 17	250 x 185 x 30	2.5kg	5/CTN
BSSLFL-300	300W	6500	3000	25Ah	350 x 450 x 17	300 x 215 x 40	3.5kg	5/CTN
BSSLFL-400	400W	6500	4000	35Ah	350 x 600 x 17	370 x 245 x 40	4.5kg	5/CTN

Remark *: CCT 3000K only for 120W & 200W