




RECESSED T-BAR PRISMATIC DIFFUSED FITTING (Metric Size)



APPLICATION

- Mainly Used for General Lighting in Office, Hypermarket, Hospital, Complex.

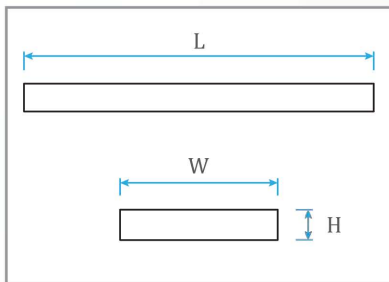

FEATURES

TYPE	T-Bar Prismatic Diffused Fitting (Metric Size)
MODEL/CODE	BSC/MM
BODY	High Quality Gauge Sheet Steel
PAINT WORK	Fully Coated With Epoxy Powder Coated Finished
MOUNTING	Recessed Type
LIGHT SOURCE	Fluorescent TLD Lamp and T8 LED Tube
LAMP HOLDER & STARTERHOLDER	Polycarbonate Material
COMPONENT	Conventional or Electronic Ballast, EL Emergency Power Pack, Fused Terminal Block

MODEL	Number Of Lamp	L (mm)	L1 (mm)	W (mm)	H (mm)
BSC 220/MM (1' x 2')	2 x 2 feet	612	585	295	92
BSC 220/MM	2 x 2 feet	612	585	595	92
BSC 320/MM	3 x 2 feet	612	585	595	92
BSC 420/MM	4 x 2 feet	612	585	595	92
BSC 240/MM (1' x 4')	2 x 4 feet	1222	1195	595	92
BSC 240/MM	2 x 4 feet	1222	1195	595	92
BSC 340/MM	3 x 4 feet	1222	1195	595	92
BSC 440/MM	4 x 4 feet	1222	1195	595	92