





# SURFACE EMERGENCY KELUAR SIGN (TR218C)

<b>Model</b>	TR218C
<b>Lamp-Mains "On"</b>	16 x 0.2W SMD LED
<b>Lamp-Mains "Off"</b>	16 x 0.2W SMD LED
<b>Battery Type</b>	Sealed Nickel- Cadmium Battery
<b>Weight</b>	1.3 kg
<b>Dimension KELUAR</b>	538(L)mm x 198(W)mm x 125(H)mm
<b>Input Voltage</b>	240V ±10%, 50Hz
<b>Lamp Used</b>	SMD LED
<b>Power Consumption</b>	<6.3VA
<b>Rated Duration</b>	>3 Hours
<b>Mode of Operation</b>	Maintained
<b>Housing</b>	Anodised Aluminium Extrusion
<b>Charging Monitor</b>	Red LED Indicates Battery Charging
<b>Projection Rating</b>	IP20
<b>Mounting</b>	Wall or Ceiling Mounting
<b>Safety Feature</b>	Low Voltage Cut-off to Prevent Over Discharge of the Battery
<b>Warranty</b>	1 Year from the Date of Delivery
<b>Certified Compliance</b>	MS 983 : 2004 MS 619-2-22 : 2012 MS IEC 60598-1 : 2012 BOMBA APPROVED

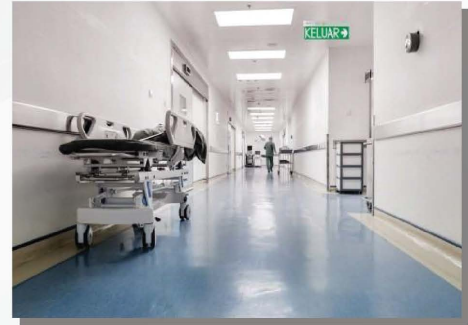

Pictogram	Single Sided	Double Sided
	TR218C (KM)	TR218C/D (KM)
	TR218C (KLR)	TR218C/D (KLR)
	TR218C (LRA)	TR218C/D (LRA)

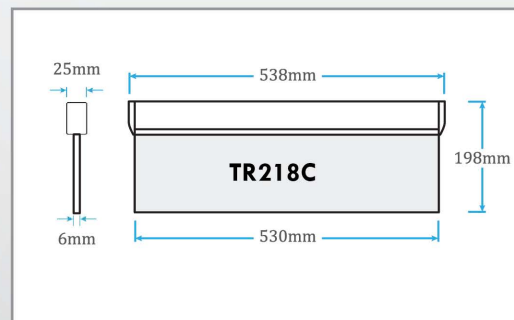

TR218C

- Quality Assured by Full SIRIM Licence in Malaysia since 1992.
- Approved by Director General of Fire Service in Malaysia.
- Approved by Standard & Industrial Research Institute of Malaysia (SIRIM).
- Approved by Chief Electrical Inspector of Malaysia.
- Complies Fully with Uniform Building By-Law Regulations in Malaysia.

Note: Due to continuous development and improvement, our company reserve the right to change specification without notice



EMERGENCY LIGHT B-6  
/ KELUAR SIGN