

WIRE GUARD BATTEN

Wire guard fitting is designed and equipped with rugged wire guard mesh to address the problem of vandalism and breakage. Hence, ensuring general illumination for everyone's safety and convenience.

** Picture shown is for illustration purpose only*

DESCRIPTION


Ordering Model	W (mm)	L (mm)	H (mm)	LED Tube
GWG 120/91/LED	62	622	93	1 x 2ft
GWG 140/91/LED	62	1230	93	1 x 4ft
GWG 220/91/LED	125	622	100	2 x 2ft
GWG 240/91/LED	125	1230	100	2 x 4ft
GWG 120/CL/LED	100	610	105	1 x 2ft
GWG 140/CL/LED	100	1220	105	1 x 4ft
GWG 220/CL/LED	100	610	105	2 x 2ft
GWG 240/CL/LED	100	1220	105	2 x 4ft
GWG 120/PL/LED	100	610	105	1 x 2ft
GWG 140/PL/LED	100	1220	105	1 x 4ft
GWG 220/PL/LED	100	610	105	2 x 2ft
GWG 240/PL/LED	100	1220	105	2 x 4ft

** /LED/1E = One End (L-N), One End (short circuit) LED tube wiring


** /LED/2E = One End (L), One End (N) LED tube wiring

** /LED/SE = Single End (L-N), another End (open circuit) LED tube wiring

PROFILE



91 Series



CL/PL Series


PHOTO



/91 = End Cap Cover



/CL= Cam Lock

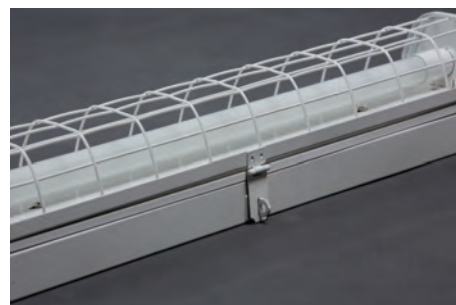

/PL = Pad Lock

Technical Data

Housing Body	Heavy gauge sheet steel body
Housing Cover	Wire mesh cover
Surface Finishing	White epoxy powder coated & oven baked
Lamp Holder	Polycarbonate housing with Copper plate contact
Wire	Heat resistance 105°C, SIRIM approved material
Connector	UL, VDE safety approved material