

LED FLOOD LIGHT : GFL-LX Series

General specification


Input Voltage	220 ~ 240Vac
Frequency	50/60Hz
Power Factor	> 0.9
Operating Temperature	-40°C ~ +50°C
IP Rating	IP65
Lifetime	30khrs
Housing Material	Die-cast Aluminium
Cover Material	Glass
Finishing	Black powder coated
Beam Angle	> 110°



Specification

MODEL	POWER	LUMEN	CCT	Input current	Surge Protection	DIMENSION (LxWxH)	NW.
GFL-LX-30W-3000	30 W	2,600 lm	3000 K	0.15A	1KV	187 x 167 x 24mm	0.43 Kg
GFL-LX-30W-4000	30 W	2,800 lm	4000 K				
GFL-LX-30W-6500	30 W	2,800 lm	6500 K				
GFL-LX-50W-3000	50 W	4,400 lm	3000 K	0.25A	1KV	217 x 185 x 26mm	0.60 Kg
GFL-LX-50W-4000	50 W	4,500 lm	4000 K				
GFL-LX-50W-6500	50 W	4,500 lm	6500 K				
GFL-LX-70W-3000	70 W	6,100 lm	3000 K	0.35A	3KV	244 x 217 x 26mm	0.75 Kg
GFL-LX-70W-4000	70 W	6,300 lm	4000 K				
GFL-LX-70W-6500	70 W	6,300 lm	6500 K				
GFL-LX-100W-3000	100 W	8,800 lm	3000 K	0.5A	3KV	287 x 232 x 32mm	1.12 Kg
GFL-LX-100W-4000	100 W	9,100 lm	4000 K				
GFL-LX-100W-6500	100 W	9,100 lm	6500 K				

Dimension

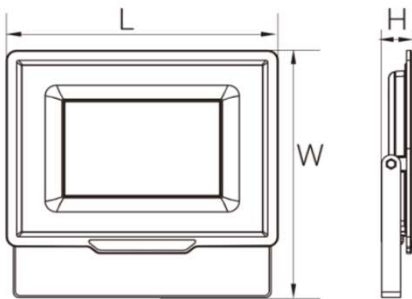

Photometric Data

