

## LED HIGH BAY : GHB-L Series

### General specification


Input Voltage	220 ~ 240 Vac
Frequency	50/60 Hz
Power Factor	> 0.9
Operating Temperature	-20°C ~ +45°C
Surge protection	2 KV (L-N)
Driver	D.O.B.
IP Rating	IP65
Lifetime	30 Khrs
Housing Material	Aluminium
Optical Material	PC
Finishing	Black powder coated



### Specification

MODEL	POWER	LUMEN	BEAM ANGLE	INPUT CURRENT	DIMENSION (DxH)	NW.
GHB-L-60W-90D-5700	60 W	6,000 lm	90°	0.26 @ 230 Vac	ø230mm x 53mm	0.76 Kg
GHB-L-100W-90D-5700	100 W	10,000 lm	90°	0.44 @ 230 Vac	ø270mm x 58mm	0.96 Kg
GHB-L-150W-90D-5700	150 W	15,000 lm	90°	0.65 @ 230 Vac	ø330mm x 68mm	1.36 Kg
GHB-L-200W-90D-5700	200 W	20,000 lm	90°	0.87 @ 230 Vac	ø380mm x 78mm	1.72 Kg

### Dimension

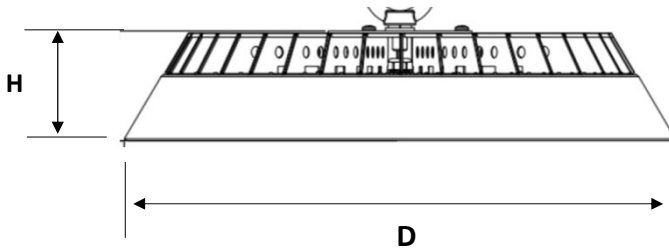

### Hanging Hook



### Distribution diagram

