



# SONIC LED

## ECO SB T8 Bare Batten Series



### Features

LED T8 bare batten provides maximum light output and energy efficient solution. Ideal replacement for traditional fluorescent T8. Suitable for a wide range of general lighting applications.


### Application

Suitable for indoor application, corridors, staircase, walkway, lift lobby and schools.

### Luminaire Product Description

Mounting	Surface/Wall/Pendant
Housing Material	Cold Roll Steel
Coating	Epoxy Polyester Powder
Light Source	SJLITE ECO Glass Tube HO
Input Voltage	240V~, 50Hz
Power Factor	>0.9
Ingress Protection	IP20
Insulation Classification	Class I

### Wiring Diagram

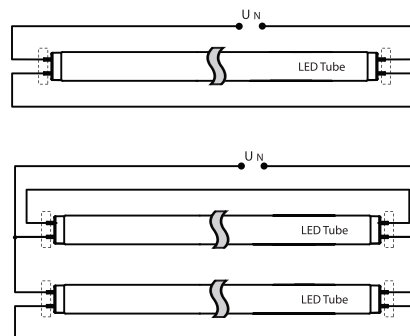


### Control

\*Dimming Option      Fixed Output




### Dimension

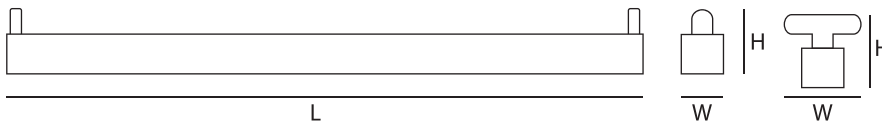

### Order Reference

Model	Quantity Of Tube	Length Of Tube
ECO SB	1	A (2ft)
	2	C (4ft)
	3	

#### Example :

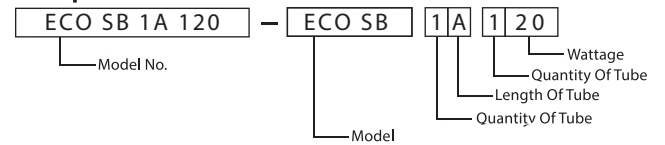

### Order Information

Model No.	No. Of Lamp	L(mm)	L1(mm)	W(mm)	W1(mm)	H(mm)	H1(mm)
ECO SB 1A 120	1	612	-	54	-	87	-
ECO SB 2A 220	2			100			
ECO SB 1C 140	1	1221		54			
ECO SB 2C 240	2			100			

Note : Subject to +/- 1.5mm

\*Other various types are available upon request.