



Your partner in lighting technology



VENUS LED

SL 401/SL 408 Lowbay Series

Features & Benefits

LED lamps control configuration to match conventional type metal halide fixtures output from 250W-400W. Easy mounting options from direct ceiling, rigid suspension rod or flexible chain mounting. Design with shielding angle for better glare control.

Application

Ideal for petrol, bus, train stations, drive-through restaurants, convenience stores, parking garages and industrial lighting applications.

Luminaire Product Description

Mounting	Surface/Hook
Housing Material	Cold Roll Sheet
Power Supply	240V 50Hz
Operating Temperature	-20°C ~+45°C
Power Factor	0.95
Total Harmonic Distortion	≤20%
Ingress Protection	IP65
Insulation Classification	Class I
Life Cycle	50,000hrs


Optics

Optical Lens	Beam angle 100°
--------------	-----------------


Control

*Dimming Option	Fixed Output/Dali/1-10V
-----------------	-------------------------

Photometric

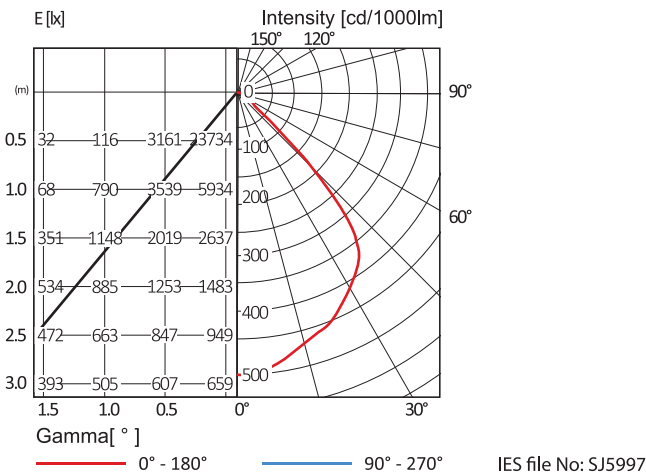

Dimension



Order Information

Model No.	Dimension (LxWxH) (mm)	Driver Model	Light Source Model	CRI & CCT	Nominal Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
SL 408.1	445x215x95	Osram Optotronic OT	Osram PrevaLED Sky	740/765	32	2950	92
SL 408.1					58	6000	103
SL 401.2	365x365x95				60	6000	100
SL 401.2					112	11800	105

Note : Subject to +/- 1.5mm

Other various types are available upon request.