




Your partner in lighting technology

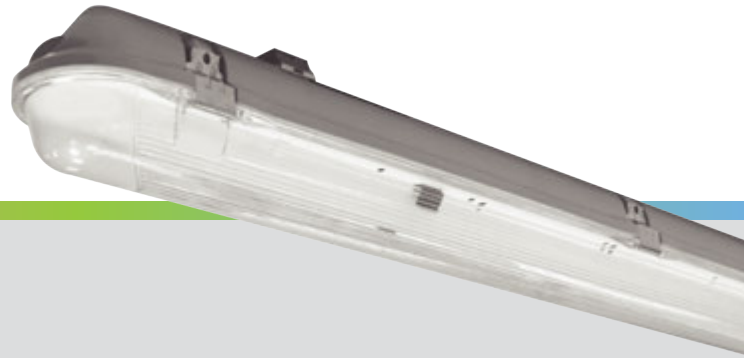

# SONIC LED

## SCR Weatherproof Series

### Features & Benefits

IP 65 weatherproof batten is a durable, robust polycarbonate base and diffuser. Gear tray retaining strap for easy installation and maintenance. Knockout and IP gland supplied for connections and through wiring. Use only the fixing brackets supplied, screws should not be used directly through the base.

### Application

Ideal for car parks, loading bays, corridors, warehouses, workshops and laboratories.

### Luminaire Product Description

Mounting	Surface
Housing Material	Polycarbonate
Power Supply	240V 50Hz
Operating Temperature	-20°C ~+35°C
Power Factor	0.95
Total Harmonic Distortion	≤20%
Ingress Protection	IP65
Insulation Classification	Class I
Life Cycle	30,000hrs/50,000hrs


### Optics

Diffuser Material	Polycarbonate
Diffuser Pattern	Frosted U Shape


### Control

*Dimming Option	Fixed Output/Dali/1-10V
-----------------	-------------------------

### Photometric

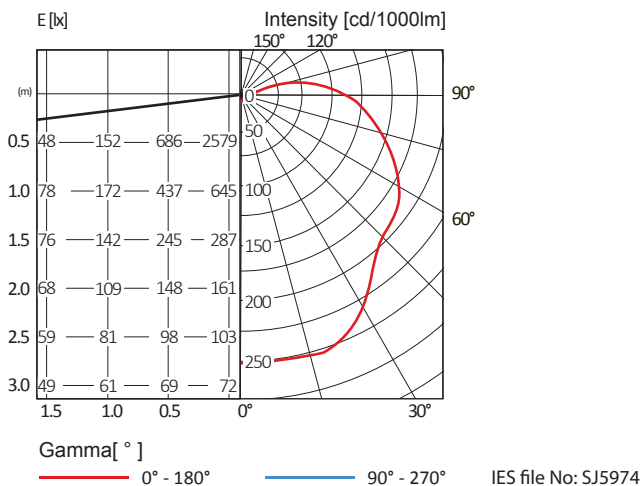


## Dimension

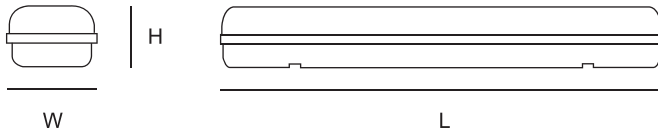

## Order Reference

Model	Number Of Module	Brand Of Component
SCR	A ( 1 module ) B ( 2 modules ) C ( 3 modules ) D ( 4 modules )	4 - Philips 5 - Tridonic

Example :

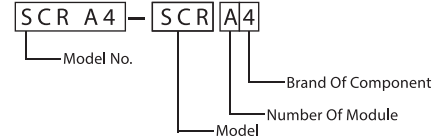

## Order Information

Model No.	Dimension (LxWxH)(mm)	Driver Model	Light Source Model	Module Dimension (WxL)(mm)	Nominal Lumen Per Modules (lm) @25°C	CRI & CCT	Nominal Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
SCR A4	660x85x87	CertaDrive	CertaFlux	20x560	1550	830/840/865	12	1250	104
SCR A4					2200		17	1800	106
SCR B4	660x134x87				1550		23	2450	107
SCR B4					2200		34	3450	101
SCR B4	1269x85x87				1550		23	2550	111
SCR B4					2200		33	3600	109
SCR D4	1269x134x87				1550		46	5050	110
SCR D4					2200		68	7250	107

Note : Subject to +/- 1.5mm

\*Other various types are available upon request.