



Your partner in lighting technology

MARS LED

SL 504 Street Light Series



Features & Benefits

High performance LED deliver a high system efficacy of up to 150lm/w. Simple installation, die-cast latches provide easy access to the electrical compartment.



Application

Ideal for urban roads, residential areas, theme parks, parking lots & etc.

Optics

Diffuser Material	Polycarbonate
-------------------	---------------


Luminaire Product Description

Mounting	Side-entry / Post-top
Housing Material	Die-cast Aluminium
Power Supply	240V 50Hz
Operating Temperature	-20°C ~+45°C
Power Factor	0.95
Total Harmonic Distortion	<10%
Ingress Protection	IP66
Insulation Classification	Class I
Life Cycle	50,000hrs


Control

*Dimming Option	Fixed Output/Dali/1-10V
-----------------	-------------------------


Photometric

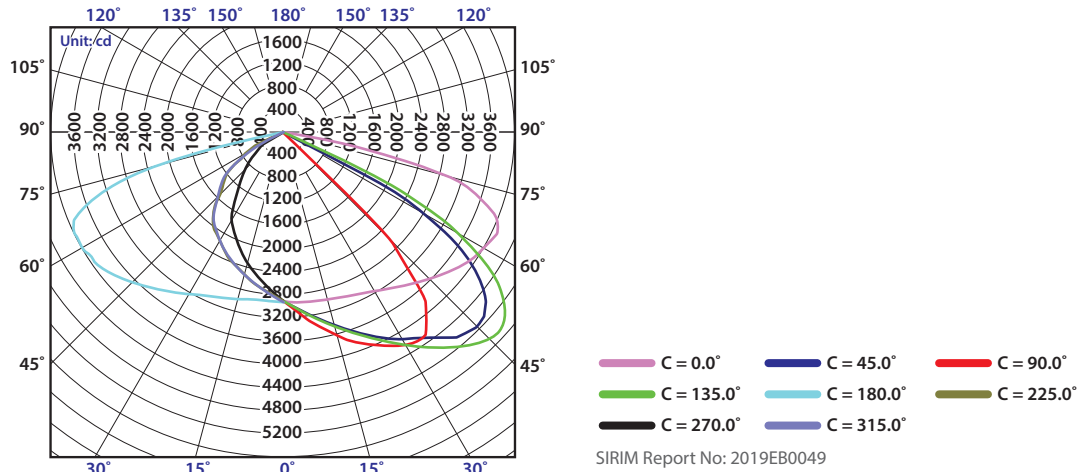

Dimension

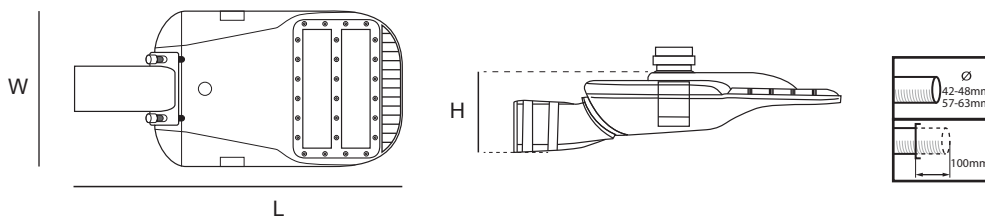

Accessories

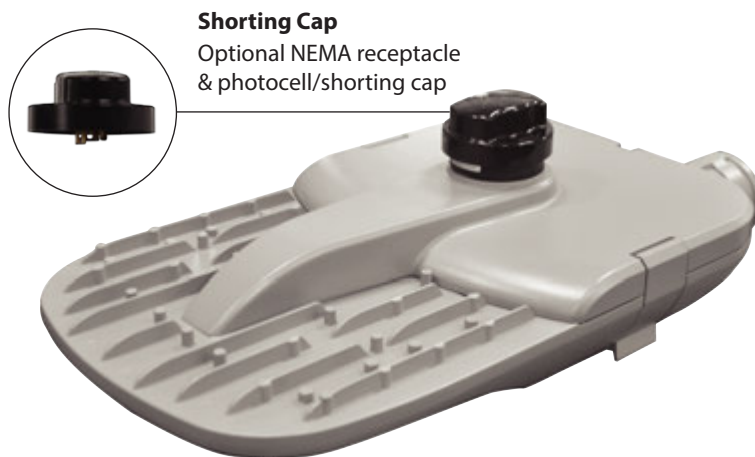

Order Information

Model No.	Dimension (LxWxH) (mm)	Driver Model	Light Source Model	CRI & CCT	Nominal Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
SL 504.80	585x285x155	Tridonic/Philips/ Adayo	Lumileds Luxeon 5050	740	76	11883	156

Note : Subject to +/- 1.5mm

Other various types are available upon request.