




Your partner in lighting technology

NEPTUNE LED

SL 301 Floodlight Series

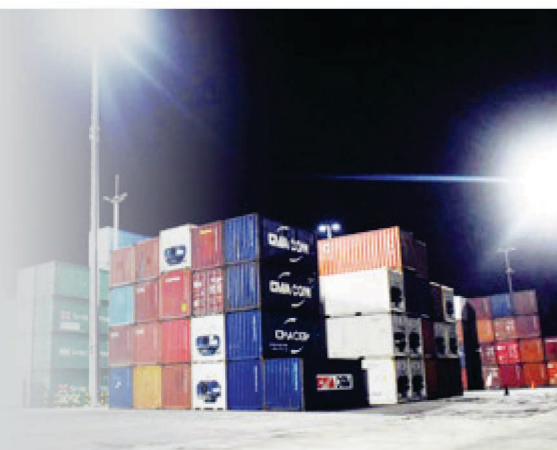

Features & Benefits

Die cast aluminum shell coated with polyester powders with high resistance to atmospheric agents and corrosion with flood symmetric light distribution. An energy-saving replacement for traditional floodlight luminaires. Offers longer service lifetime and less maintenance. Efficient air convection cooling design.



Application

Suitable for buildings, advertising boards, parks, plaza dock and greenwood.

Optic

Cover	Tempered Glass
Optical Lens	Beam Angle 60°
	Beam Angle 75° * 135°


Luminaire Product Description

Mounting	Ground/Wall
Housing Material	Die-cast Aluminum
Power Supply	240V 50Hz
Operating Temperature	-30°C~+45°C
Power Factor	0.95
Total Harmonic Distortion	<20%
Ingress Protection	IP65
Insulation Classification	Class I
Life Cycle	50,000hrs


Control

*Dimming Option	Fixed Output/Dali/1-10V
-----------------	-------------------------

Photometric

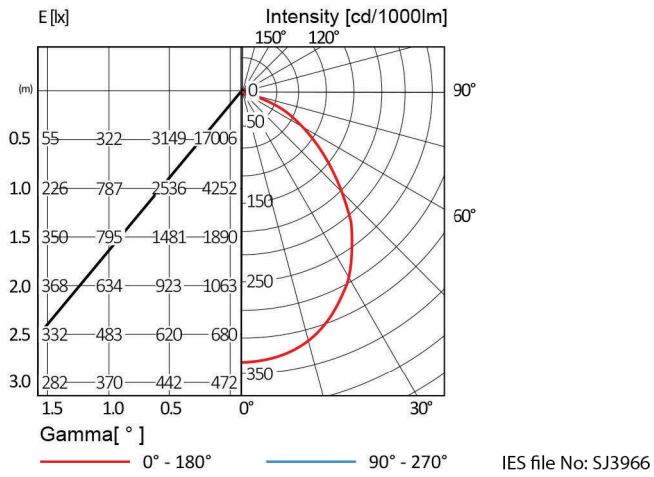

Dimension

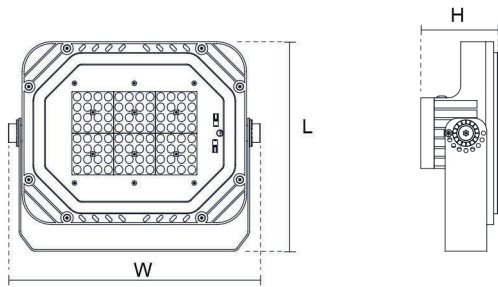

Order Information

Model No.	Dimension (LxWxH) (mm)	Driver Model	Light Source Model	CRI & CCT	Nominal Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
SL 301.60	246x303x96	Meanwell	Lumileds	730/740/765	60	7800	130
SL 301.100	308x385x110				100	13000	
SL 301.150					150	19500	
SL 301.200					200	26000	

Note : Subject to +/- 1.5mm

Other various types are available upon request.