



Your partner in lighting technology



METEOR LED

SRU Linear Louvre Series

Features & Benefits

Designed for recess mounting ceiling. LED panel lights highlighting the use of a new generation of low power and high power LED as light source. Excellent light transmission, which provide an outstanding performance effect for your application. Good control of luminous with design cut off angle of 60°. Glare control UGR <16.

Application

Ideal for offices, retail stores, supermarkets, schools, hotels, factories, car parks and other indoor places to use.

Luminaire Product Description

Mounting	Recessed
Housing Material	Cold Roll Sheet
Power Supply	240V 50Hz
Operating Temperature	45°C
Power Factor	0.95
Total Harmonic Distortion	≤20%
Ingress Protection	IP20
Insulation Classification	Class I
Life Cycle	30,000hrs/50,000hrs


Optics

Diffuser Material	Acrylic
Diffuser Pattern	AA12
Louvre Material	High Quality Anodised Aluminium
Louvre Type	Specular


Control

*Dimming Option	Fixed Output/Dali/1-10V
-----------------	-------------------------

Photometric

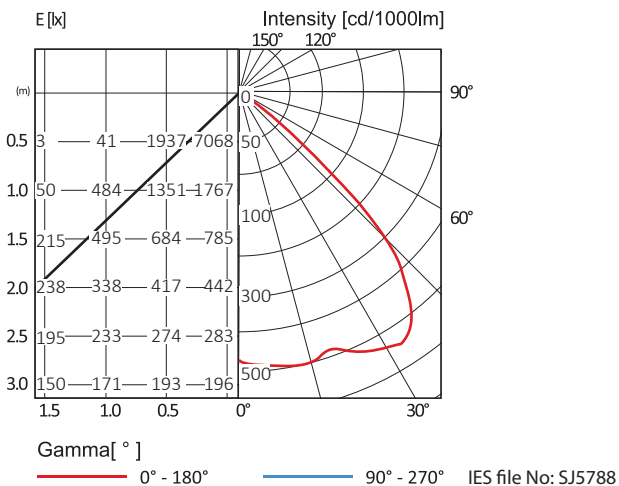


Dimension



Order Reference

Model	Number Of Module	Brand Of Component
SRU	A (1 module)	4 - Philips
	B (2 modules)	5 - Tridonic
	C (3 modules)	
	D (4 modules)	
	E (5 modules)	
	F (6 modules)	

Example :

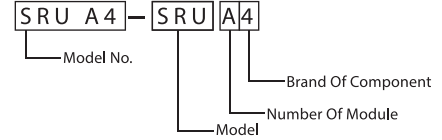

Order Information

Model No.	Dimension (LxWxH) (mm)	Driver Model	Light Source Model	Module Dimension (WxL) (mm)	Nominal Lumen Per Modules (lm) @25°C	CRI & CCT	Nominal Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
SRU A4 114	595x295x70	CertaDrive	CertaFlux	20x560	1550	830/840/865	12	1250	104
SRU A4 114					2200		17	1800	106
SRU B4 128	1195x295x70				1550		23	2500	109
SRU B4 128					2200		34	3600	106

Note : Subject to +/- 1.5mm

*Other various types are available upon request.