


LED 1330-M LED POWER PACK MODULE

SPECIALLY DESIGNED
FOR LED LAMPS

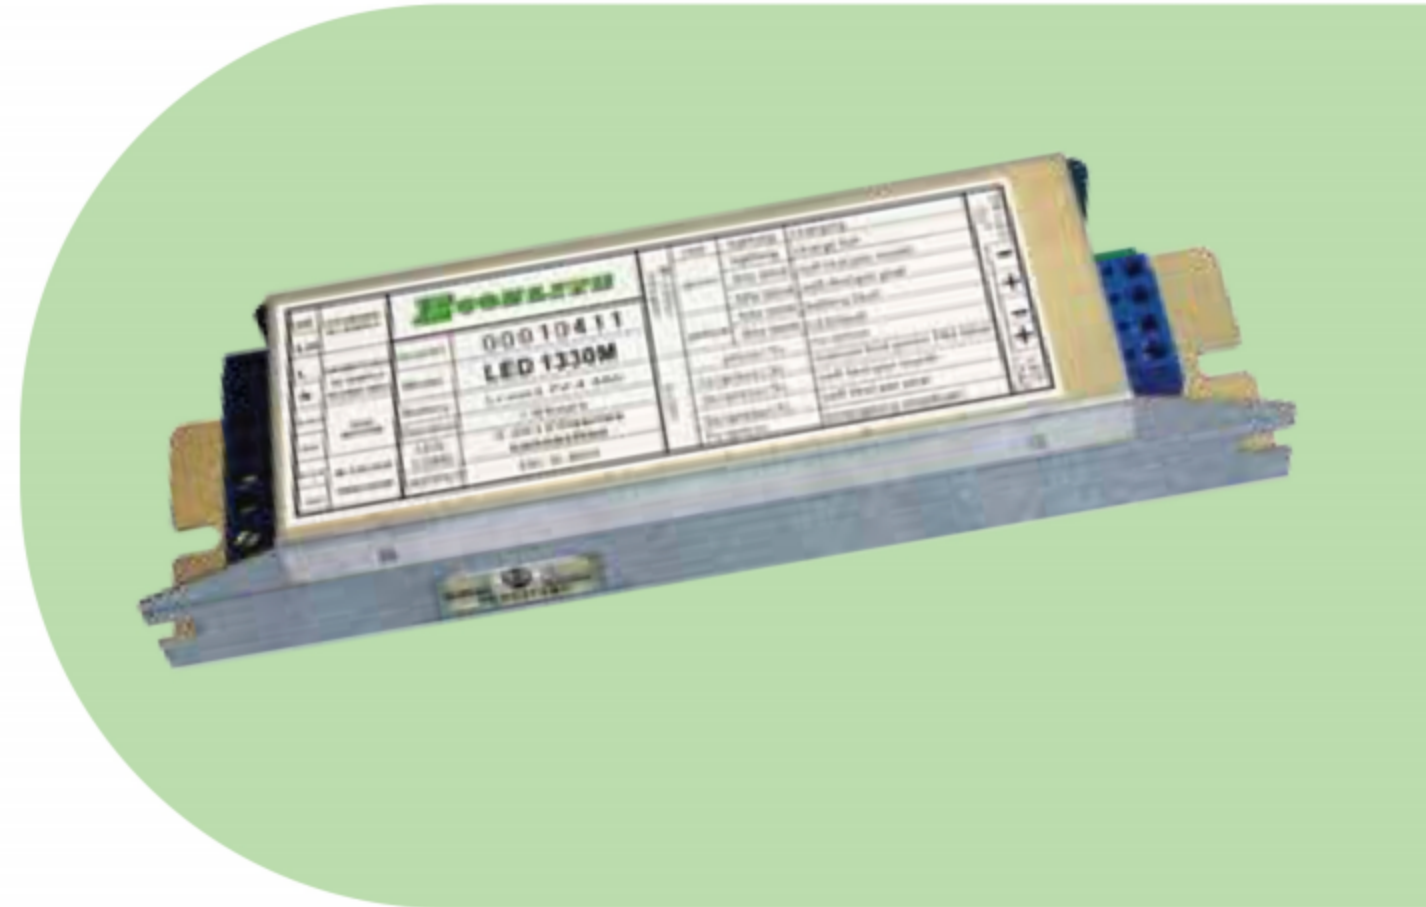

Technical Data

Mode of Operation	: Maintained / Non-Maintained.
Input Voltage	: 240V \pm 10%, 50 Hz
Battery	: Li-ion Battery with External Protection Circuit.
Charging Current	: 300mA
DC Voltage	: 15 -200V
Operating Temperature	: 0°C to 60°C
Charger	: Fully Automatic.
Indication	: Red L.E.D. "On" Indicates Charging Equipped with Push Test-Switch to Simulate Power Failure.
Backup Time	: 3 Hours Duration.
Construction	: Electro-Galvanised Steel Casing, Epoxy Powder Coating.
Weight	: Ω 1.2kg (Excluding Batteries).
#Warranty	: 5 Years
Compliance	: Malaysia Standards MS-619, IP-20.
Protection	: Low-Voltage Cut-Off to Prevent Over-Discharge of Battery.

Dimension in mm Tolerance: \pm 0.03

Recessed Mounting

