


# Product datasheet

Specifications

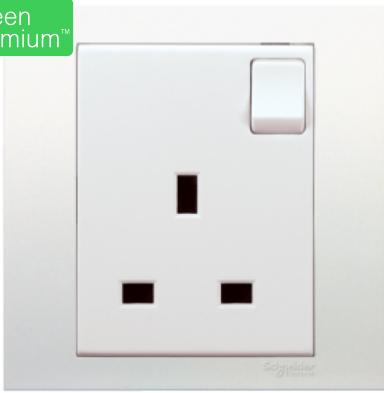

## 13A 250V 1 Gang Switched Socket

KB15\_WE\_G11

### Main

Range	Vivace
Product or component type	Switched socket
Device short name	KB15
Device presentation	Complete product

### Complementary

Outlet poles configuration	2P + E
Number of gangs	1 gang
Colour tint	White
Material	Polycarbonate: grid plate Polycarbonate: surround Polycarbonate: base
Projecting depth	8 mm
Device mounting	Flush
Mounting support	Wall mounted
Fixing mode	By screw M3.5
Fixing center	60.3 mm
Embedding depth	35 mm
Rated current	13 A at 250 V AC, resistive
Network frequency	50 Hz
Contacts material	Brass and phosphor bronze
Connections - terminals	Pillar terminal
Terminal identifier	N Earth L
Tightening torque	0.4 N.m
Clamping connection capacity	2 x 4 mm <sup>2</sup> 3 x 2.5 mm <sup>2</sup>
Width	87 mm
Height	87 mm

## Environment

Standards	MS 589 SS 145 BS 1362-2
Ambient air temperature for operation	-5...40 °C
Relative humidity	0...95 %
Operating altitude	<= 2000 m
Environmental characteristic	Indoor use

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	110.0 g
Package 1 Height	21 cm
Package 1 Width	31.5 cm
Package 1 Length	50 cm
Unit Type of Package 2	PAL
Number of Units in Package 2	1600
Package 2 Weight	176000.0 g
Package 2 Height	86 cm
Package 2 Width	80 cm
Package 2 Length	120 cm
Unit Type of Package 3	BB1
Number of Units in Package 3	8
Package 3 Weight	880.0 g
Package 3 Height	9.5 cm
Package 3 Width	15 cm
Package 3 Length	19.5 cm

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	<a href="#">Product Environmental Profile</a>

## Contractual warranty

Warranty	18 months
----------	-----------

**Recommended replacement(s)**