


Product datasheet

Specifications



13A Twin Gang Socket, White

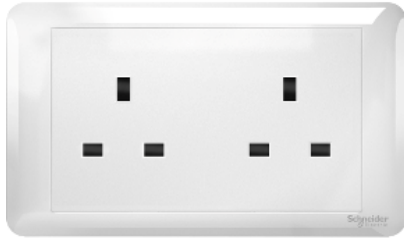

A3GT426_WE_G11

Main

Range	Affle Plus
Product or component type	Socket-outlet
Socket additional information	Shuttered
Outlet poles configuration	3P BS 1363
Load type	Resistive
Colour tint	White

Complementary

Device mounting	Flush
Clamping connection capacity	1 x 4...2 x 4 mm ² for solid cable(s) 1 x 4...2 x 4 mm ² for stranded cable(s) 1 x 2.5...2 x 2.5 mm ² for solid cable(s) 1 x 2.5...2 x 2.5 mm ² for stranded cable(s)
Rated current	13 A at 250 V AC 50 Hz
Number of gangs	2 gangs
Material	Polycarbonate grid plate Polycarbonate surround
Connections - terminals	Folded terminal
Embedding depth	19 mm
Width	146 mm
Height	86 mm
Depth	27 mm

Environment

Ambient air temperature for operation	35 °C
Ambient air temperature for storage	-5...45 °C
Relative humidity	0...95 %
Environmental characteristic	UV resistant
Operating altitude	5000 m
IP degree of protection	IP20
Standards	BS 1363

Product certifications	SIRIM
------------------------	-------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.7 cm
Package 1 Width	8.6 cm
Package 1 Length	14.6 cm
Package 1 Weight	121 g
Unit Type of Package 2	BB1
Number of Units in Package 2	7
Package 2 Height	9.5 cm
Package 2 Width	15 cm
Package 2 Length	19 cm
Package 2 Weight	849 g
Unit Type of Package 3	CAR
Number of Units in Package 3	84
Package 3 Height	21 cm
Package 3 Width	39.9 cm
Package 3 Length	46.9 cm
Package 3 Weight	10.688 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile

Recommended replacement(s)