


Product datasheet

Specifications

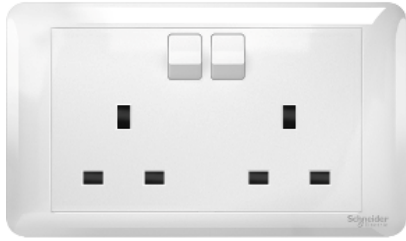

13A Twin Gang Switched Socket, White

A3GT25_WE_G11

Main

| | |
|-------------------------------|-----------------------|
| Range | Affle Plus |
| Product or component type | Switched socket |
| Device presentation | Mechanism |
| Outlet poles configuration | 3P with shutter |
| Outlet standard description | With earthing contact |
| Outlet standard deviation | BS 1363 |
| Colour tint | White |
| Type of packing | Flow-pack |
| Sale per indivisible quantity | 1 |
| Number of terminals | 3 |

Complementary

| | |
|--------------------------------|--|
| Socket number | 2 |
| Device mounting | Flush |
| Fixing mode | Screw |
| Surface finish | Glossy |
| Surface treatment | Untreated mechanism cover |
| Rated current | 13 A socket-outlet |
| [Ue] rated operational voltage | 250 V AC 50/60 Hz |
| Service life in cycles | 15000 cycles |
| Electrical durability | 15000 cycles |
| Connections - terminals | Screw terminal |
| Screwdriver shape | Philips No 2 |
| Number of cables | 2 |
| Clamping connection capacity | 2.5...4 mm ² for rigid cable(s) 2.5...4 mm ² for stranded cable(s) 2.5...4 mm ² for flexible cable(s) |
| Wire stripping length | 14 mm |
| Material | PC (polycarbonate) Brass |
| Height | 86 mm |

| | |
|-----------------|----------|
| Width | 146 mm |
| Depth | 29.2 mm |
| Embedding depth | 18.3 mm |
| Net weight | 0.114 kg |

Environment

| | |
|---------------------------------------|-------------------|
| Ambient air temperature for storage | -5...45 °C |
| Ambient air temperature for operation | -5...45 °C |
| Standards | BS 1363 MS 589 |
| Product certifications | SIRIM |
| IP degree of protection | IP20 |

Packing Units

| | |
|------------------------------|---------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 2.9 cm |
| Package 1 Width | 8.6 cm |
| Package 1 Length | 14.6 cm |
| Package 1 Weight | 121 g |
| Unit Type of Package 2 | BB1 |
| Number of Units in Package 2 | 7 |
| Package 2 Height | 9.5 cm |
| Package 2 Width | 15 cm |
| Package 2 Length | 19 cm |
| Package 2 Weight | 850 g |
| Unit Type of Package 3 | CAR |
| Number of Units in Package 3 | 84 |
| Package 3 Height | 21 cm |
| Package 3 Width | 39.9 cm |
| Package 3 Length | 46.9 cm |
| Package 3 Weight | 10.7 kg |

Offer Sustainability

| | |
|----------------------------|--|
| Sustainable offer status | Green Premium product |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Compliant EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| China RoHS Regulation | China RoHS declaration |
| RoHS exemption information | Yes |

Recommended replacement(s)