


DRACO VELO STREET LANTERN

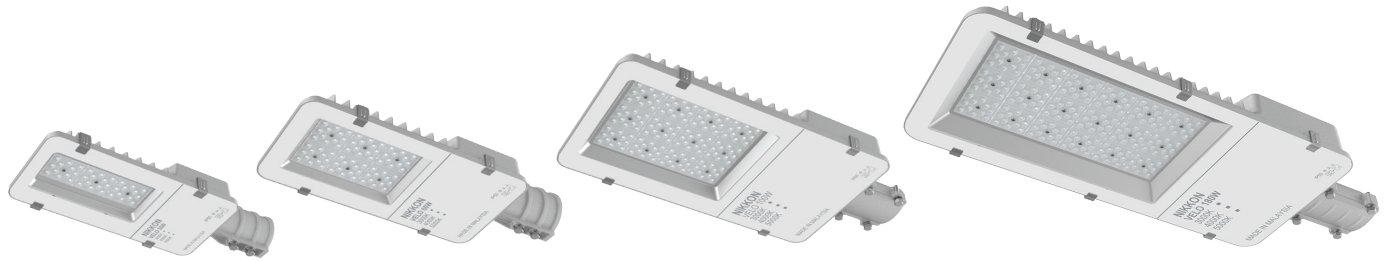

VELO 30W

VELO 60W

VELO 100W & 120W

VELO 150W & 180W

LUMINAIRE SPECIFICATIONS

- Power 30W
60W
100W
120W
150W
180W
- Fitting Material Die-Cast Aluminium Non-Corrosive
- Fitting Color White Aluminium, Akzo Nobel RAL9006
- Optical Cover 95% Transparency Tempered Glass
- Ingress Protection IP65
- Impact Protection IK08
- Voltage 220 ~ 240 Vac 50 / 60Hz
- Electrical Safety Class Class I
- Operating Temperature -30 ~ +45°C
- Installation Ø42mm Side Entry (30W)
Ø48mm Side Entry (60W)
Ø48mm Side Entry (100W & 120W)
Ø60mm Side Entry (150W & 180W)
- Surge Protections 10KV, 20KA
- Beam Angle 145° x 65°

LED MODULE SPECIFICATIONS

- Color Temperature 3000K Warm White
4000K Neutral White
5000K Cool White
 - Color Rendering Index (CRI) >70
 - L70 100,000 Hrs @ 25°C
 - PCB Material Metal Core
- ### COMPLIANCE STANDARD
- LED LM80
 - Driver CE, EN55015, EN61000, EN61547

APPLICATION

- Pathways, Parks, Car Parks, Foot Paths, Access Ways, Road Lightings, Residential Areas, Municipal Expressways & Facade Lightings

MEASUREMENT & ORDER CODE


WATTAGE	ORDER CODE	NO. OF LEDS	TYPICAL LUMINOUS FLUX	TYPICAL WATTAGE	CARTON DIMENSION (L x W x H) mm	NETT WEIGHT
30W	VELO 30W	36	4000	34	410 x 170 x 115	2.5 kg
60W	VELO 60W	72	7600	62	465 x 200 x 100	3.0 kg
100W	VELO 100W	144	13000	101	545 x 270 x 105	5.0 kg
120W	VELO 120W	144	15200	120	545 x 270 x 105	5.0 kg
150W	VELO 150W	216	20800	156	715 x 285 x 135	6.0 kg
180W	VELO 180W	216	23100	180	715 x 285 x 135	6.0 kg

* All result tested base on 5000K CCT LEDs.




DIMENSION


VELO 30W




VELO 100W / 120W

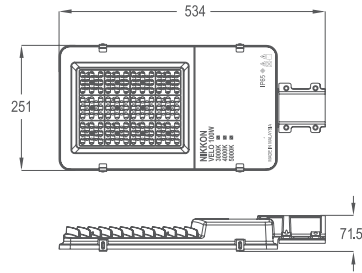

VELO 60W




VELO 150W / 180W

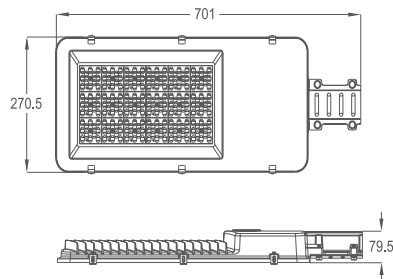

PHOTOMETRIC

Type II



cd/klm
C0/C180: — C90/C270: —

Note: All specifications are subject to change without prior notice for product improvement. Images, pictures, and illustrations used are for illustrative purposes only and the color printed may differ from the actual product.