

BRONZO I-DRIVE RMS LOWBAY (RECESSED)



LUMINAIRE SPECIFICATIONS

- **Power** 70W
105W
140W
- **Fitting Material** Cold Roll Steel
- **Fitting Color** White, Akzo Nobel RAL9010
- **Optical Cover** Anti Glare Frosted Polycarbonate Diffuser
- **Heat Sink** Extruded Aluminium
- **Ingress Protection** IP20
- **Impact Protection** IK08
- **Voltage** 220 ~ 240 Vac 50 / 60Hz
- **Electrical Safety Class** Class I
- **Operating Temperature** -30 ~ +40°C
- **Installation** Recessed Mounting Opening Hole:
251 x 326 mm (70W)
346 x 326 mm (105W)
441 x 326 mm (140W)
- **Surge Protections** 4KV, 12KA

LED MODULE SPECIFICATIONS

- **Color Temperature** 5700K Cool White
- **Color Rendering Index (CRI)** >70
- **L70** 40,000 Hrs @ 25°C
- **PCB Material** Ceramic (Alumina Substrate)
- **PCB Trace** Silver Conductor (Ag)
- **SMD Connector** WAGO 2060 Series

COMPLIANCE STANDARD

- **LED** LM80, UL, RoHS

APPLICATION

- Petrol Kiosks, Toll Plazas, Canopy Lightings, Multipurpose Halls, Warehouses, Gymnasiums & Exhibition Halls


MEASUREMENT & ORDER CODE

WATTAGE	ORDER CODE	NO. OF LEDS	TYPICAL LUMINOUS FLUX	CARTON DIMENSION (L x W x H) mm	NETT WEIGHT
70W	K03110 70W RMS	72	6600	440 x 320 x 200	5.0 kg
105W	K03110 105W RMS	92	9900	440 x 420 x 200	7.0 kg
140W	K03110 140W RMS	144	13200	440 x 525 x 200	9.4 kg




DIMENSION


K03110 70W RMS



K03110 105W RMS

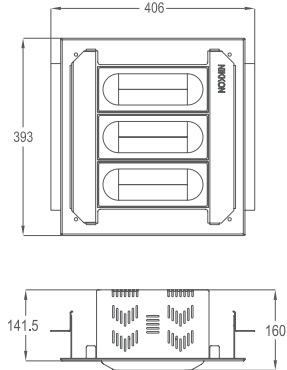


K03110 140W RMS

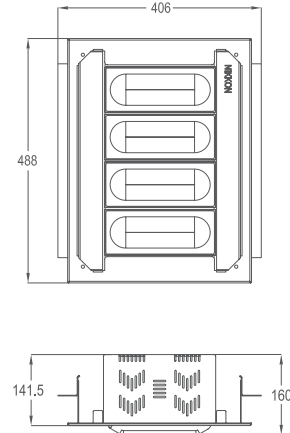


PHOTOMETRIC


K03110 70W RMS



K03110 105W RMS



K03110 140W RMS



Note: All specifications are subject to change without prior notice for product improvement. Images, pictures, and illustrations used are for illustrative purposes only and the color printed may differ from the actual product.