

DRACO IP65 PC WEATHERPROOF FITTING



DRACO K04109 24W



DRACO K04110 45W

LUMINAIRE SPECIFICATIONS

• Power	24W 45W
• Fitting Material	ABS
• Optical Cover	Opal PC Cover
• Ingress Protection	IP65
• Impact Protection	IK08
• Voltage	220 ~ 240 Vac 50 / 60Hz
• Electrical Safety Class	Class I
• Operating Temperature	-20 ~ +35°C
• Installation	Mounting Bracket

LED MODULE SPECIFICATIONS

• Color Temperature	4000K Neutral White 6000K Day Light
• Color Rendering Index (CRI)	>70 Day Light & Neutral White
• L70	50,000 Hrs @ 25°C
• PCB Material	FR4
• PCB Trace	Copper

FEATURES

- Better light efficiency & distribution
- Energy-saving and environment-friendly, without Mercury & Lead
- No radiation from UV & Infrared
- Good protection to the illuminated objects
- Pre-Installed External Driver

COMPLIANCE STANDARD

• LED	LM 80
• Driver	CE, EN55015, EN61000, EN61547

APPLICATION

- Carparks, Passage Ways, Foot Paths, Access Ways, Facade, Corridors, Sport & Garden Lightings





MEASUREMENT & ORDER CODE


Model	Length	Width	Extends	A1	A2
24W	1268	105	105	900	1000
45W	1268	163	105	900	1000

WATTAGE	ORDER CODE	CARTON DIMENSION (L x W x H) mm	NETT WEIGHT
24W	K04109 24W	1295 x 230 x 340 * 4 pcs per carton	2.06 kg
45W	K04110 45W	1300 x 340 x 350 * 4 pcs per carton	2.94 kg

* Please indicate LED color temperature when ordering.

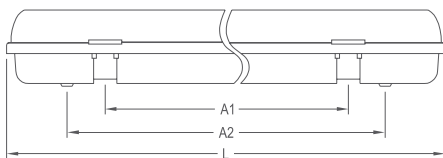


24W



45W


PHOTOMETRIC

DRACO K04109 24W



cd/ftm
C0/C180: — C90/C270: —

DRACO K04110 45W



cd/ftm
C0/C180: — C90/C270: —

WATTAGE	NO. OF LEDS	TYPICAL LUMINOUS FLUX	TYPICAL WATTAGE
24W	112	1920	25.2
45W	224	3600	46.9

* All result tested base on 6000K CCT LEDs.