


# ARGENTO STAINLESS STEEL WEATHERPROOF FITTING

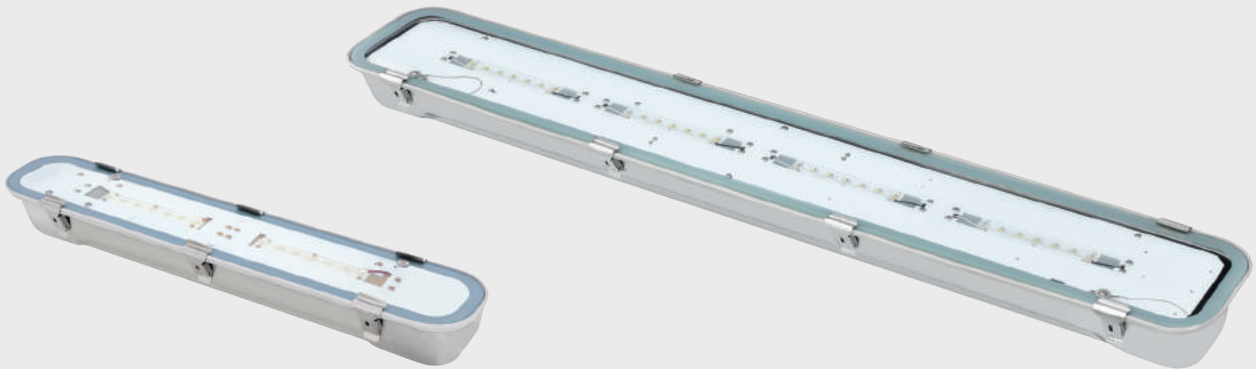

ARGENTO K04105 30W

ARGENTO K04106 60W

## LUMINAIRE SPECIFICATIONS

• Power	30W 60W (SY) 60W (ASY)
• Fitting Material	304 Stainless Steel
• Optical Cover	Clear Glass
• Ingress Protection	IP66
• Impact Protection	IK08
• Voltage	220 ~ 240 Vac 50 / 60Hz
• Electrical Safety Class	Class I
• Operating Temperature	-30 ~ +45°C
• Installation	Hook Mounting
• Surge Protections	10KV, 20KA

## LED MODULE SPECIFICATIONS

• Color Temperature	3000K Warm White 4000K Neutral White 5300K Cool White
• Color Rendering Index (CRI)	>70 Cool White & Neutral White >80 Warm White
• L70	100,000 Hrs @ 25°C
• PCB Material	Ceramic (Alumina Substrate)
• PCB Trace	Silver Conductor (Ag)
• SMD Connector	WAGO 2060 Series

## OPTIONAL FEATURES

- Optics : Symmetrical, Asymmetrical

## COMPLIANCE STANDARD

- |          |                               |
|----------|-------------------------------|
| • LED    | LM 80                         |
| • Driver | CE, EN55015, EN61000, EN61547 |

## APPLICATION


- Residential Areas, Garages, Cold Storage Rooms, Marine & Mining Lightings





## MEASUREMENT & ORDER CODE


### ARGENTO K04105 30W

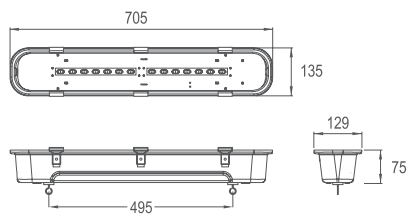

WATTAGE	ORDER CODE	CARTON DIMENSION (L x W x H) mm	NETT WEIGHT
30W	K04105 30W	770 x 160 x 140	4.6 kg
60W	K04106 60W (SY)	1365 x 220 x 140	8.6 kg
60W	K04106 60W (ASY)	1365 x 220 x 140	8.6 kg


\* Please indicate LED color temperature and optic when ordering.

### ARGENTO K04106 60W

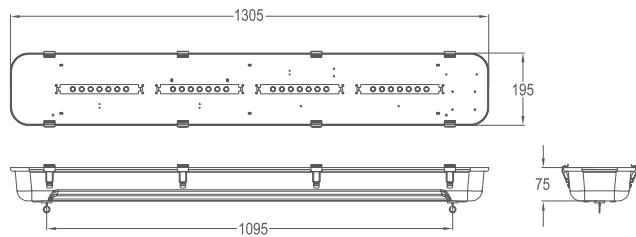


## PHOTOMETRIC

### ARGENTO K04106 60W SY

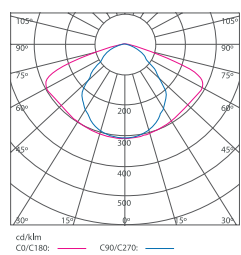

### ARGENTO K04106 60W ASY

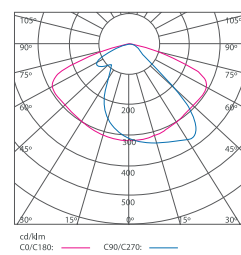

WATTAGE	NO. OF LEDs	TYPICAL LUMINOUS FLUX @ 700 mA	TYPICAL WATTAGE
30W	14	2750	32.5
60W	28	5850	66

\* All result tested base on 5300K CCT LEDs.