



LINEAR L36-42W

### LUMINAIRE SPECIFICATIONS

- Power 11W  
42W
- Fitting Material Non-Corrosive  
Die Cast Alumunium
- Fitting Color Dark Grey, RAL9023
- Optical Cover Clear Tempered Glass
- Ingress Protection IP66
- Impact Protection IK08
- Voltage 220-240Vac 50 / 60Hz
- Electrical Safety Class Class 1
- Operating Temperature -30 ~ +45°C
- Installation Mounting Bracket
- Beam Angle 20°
- Control Mode DMX512, Constant Current

### LED MODULE SPECIFICATIONS

- LED Chips Cree
- Color Temperature RGBW, RGB, Single
- Life Span 50,000hrs

### APPLICATION

- Historical Building, Praying Hall, Theaters, Museums, Passageways, Corridors Areas, Exhibitions Halls, Parks & Garden, Parking Lots, Commercial & Residential Areas, Facade Lightings


### MEASUREMENT & ORDER CODE

WATTAGE	NO OF LEDs	TYPICAL WATTAGE	NETT WEIGHT
11W	9	12W	3.8kg
42W	36	45W	2.5kg



## DIMENSION

LINEAR L9 11W

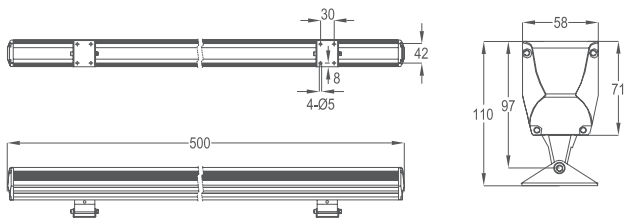

LINEAR L36 42W

