



OVAL R6-30W



OVAL R9-60W



OVAL R16-90W

LUMINAIRE SPECIFICATIONS

- **Power** 30W
60W
90W
- **Fitting Material** Non-Corrosive
Die Cast Aluminium
- **Fitting Color** Dark Grey, RAL9023
- **Optical Cover** Clear Tempered Glass
- **Ingress Protection** IP66
- **Impact Protection** IK08
- **Voltage** 220-240Vac 50 / 60Hz
- **Electrical Safety Class** Class 1
- **Operating Temperature** -30 ~ +45°C
- **Installation** Mounting Bracket
- **Beam Angle** 20°
- **Control Mode** DMX512, Constant Current

LED MODULE SPECIFICATIONS

- **LED Chips** Cree
- **Color Temperature** RGBW, Single
- **Life Span** 50,000hrs

APPLICATION

- Historical Building, Praying Hall, Theaters, Museums, Passageways, Corridors Areas, Exhibitions Halls, Parks & Garden, Parking Lots, Commercial & Residential Areas, Facade Lightings


MEASUREMENT & ORDER CODE

WATTAGE	NO OF LEDs	TYPICAL WATTAGE	NETT WEIGHT
30W	6	32W	3kg
60W	9	63W	4kg
90W	16	95W	6kg




DIMENSION

OVAL R6 30W

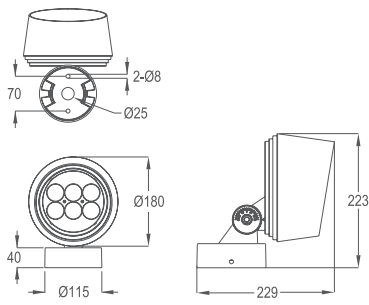

OVAL R9 60W

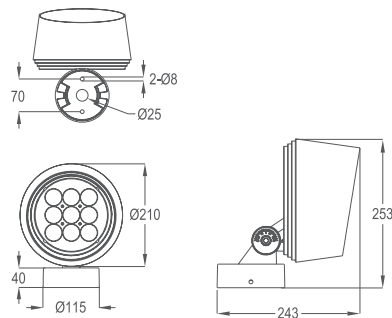

OVAL R16 90W

