

S1501




features

- electrical system**
- built-in control gear suitable for HID lamps from 70W - 150W
- housing**
- high pressure aluminium die-cast housing with AKzo Nobel Interpon outdoor epoxy powder coating
- reflector**
- high purity anodized hammered finish aluminium reflector
- glass**
- thermal resistant tempered glass
- mounting bracket**
- steel mounting bracket coated with epoxy powder


technical data

ingress protection • IP65
 voltage • 220 - 240 Vac 50 / 60Hz
 lamp wattage • 70W - 150W
 holder type • RX7s
 maximum weight • 5 kg
 colour of housing • white & black

photometric curve

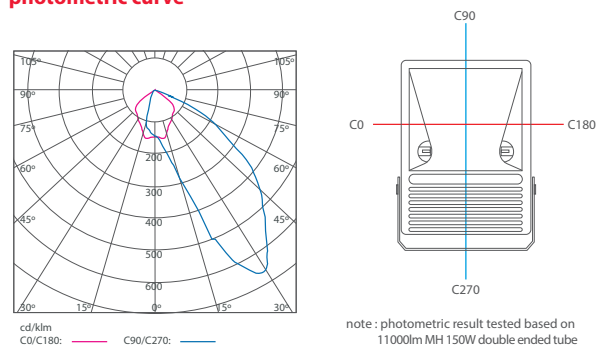

dimension

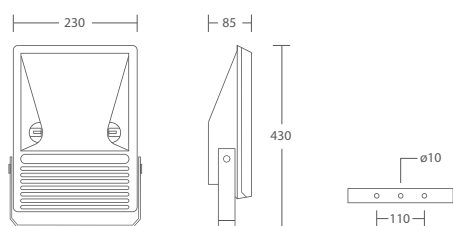

key for standard order coding

S1501 - S 0150

- capacity code : example = 150W
- lamp type : S = high pressure sodium ; M = metal halide
- casing model

order code

model	lamp type	lamp holder	carton dimension (L x W x H) mm	order code
S1501 MH 70W	double ended	RX7s	441 x 265 x 100	S1501-M0070
S1501 MH 150W	double ended	RX7s	441 x 265 x 100	S1501-M0150
S1501 HPS 70W	double ended	RX7s	441 x 265 x 100	S1501-S0070
S1501 HPS 150W	double ended	RX7s	441 x 265 x 100	S1501-S0150

* casing available in black and white colour.

note: Due to rapid change and continuous improvement in technology, all specifications are subject to change without prior notice to improve reliability, function or design in order to supply the best product possible.