

S1538

220 - 240V 50 / 60Hz Rx7s



IP65



CE



features

housing

- high pressure aluminium die-cast housing with AKzo Nobel Interpon outdoor epoxy powder coating

reflector

- high purity anodized hammered aluminium reflector

glass

- frameless thermal resistant tempered glass

mounting bracket

- steel mounting bracket coated with epoxy powder

colour of housing

- MAT RAL 9006 (Akzo Nobel)


compliance and approvals

- sirim general requirement & test IEC60598-1:2003
- sirim particular requirement (floodlight) IEC60598-2-5:2006


technical data

- ingress protection • IP66
- voltage • 220 - 240 Vac 50 / 60Hz
- lamp wattage • 70W - 150W
- holder type • RX7s
- maximum weight • 6 kg

photometric curve




S1538 - Sy




note : photometric result tested based on 13500lm MH150w tube

dimension

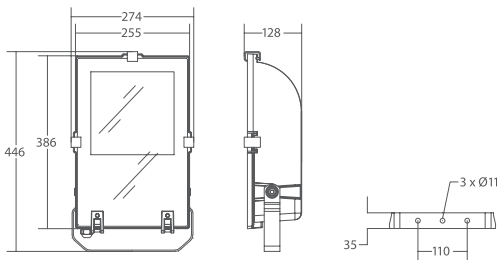

key for standard order coding

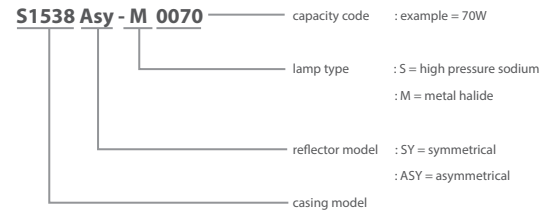

order code

model	lamp type	lamp holder	carton dimension (L x W x H) mm	order code
S1538 SY MH 70W	double ended	RX7s	465 x 300 x 160	S1538 SY-M0070
S1538 SY MH 150W	double ended	RX7s	465 x 300 x 160	S1538 SY-M0150
S1538 SY HPS 70W	double ended	RX7s	465 x 300 x 160	S1538 SY-S0070
S1538 SY HPS 150W	double ended	RX7s	465 x 300 x 160	S1538 SY-S0150
S1538 ASY MH 70W	double ended	RX7s	465 x 300 x 160	S1538 ASY-M0070
S1538 ASY MH 150W	double ended	RX7s	465 x 300 x 160	S1538 ASY-M0150
S1538 ASY HPS 70W	double ended	RX7s	465 x 300 x 160	S1538 ASY-S0070
S1538 ASY HPS 150W	double ended	RX7s	465 x 300 x 160	S1538 ASY-S0150

• ASY - asymmetrical reflector • SY - symmetrical * E27 lamp holder only available upon request.

note : Due to rapid change and continuous improvement in technology, all specifications are subject to change without prior notice to improve reliability, function or design in order to supply the best product possible.