

# S2038

220 - 240V 50 / 60Hz E40



IP65



CE



## features

### housing

- high pressure aluminium die-cast housing with AKzo Nobel Interpon outdoor epoxy powder coating

### reflector

- high purity anodized hammered aluminium reflector

### glass

- frameless thermal resistant tempered glass

### mounting bracket

- steel mounting bracket coated with epoxy powder

### colour of housing

- MAT RAL 9006 (Akzo Nobel)

### compliance and approvals

- sirim general requirement & test IEC60598-1:2003
- sirim particular requirement (floodlight) IEC60598-2-5:2006

## technical data

ingress protection • IP66


voltage • 220 - 240 Vac 50 / 60Hz

lamp wattage • 250W - 400W


holder type • E40

maximum weight • 10.5 kg

## photometric curve




S2038 - ASY




note: photometric result tested based on 32000lm MH400w tube

## dimension

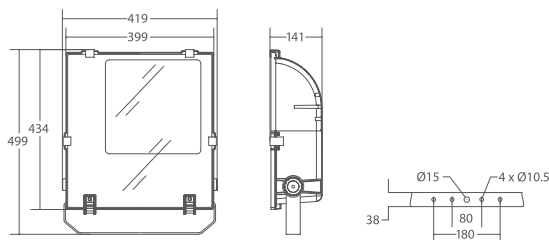

## key for standard order coding

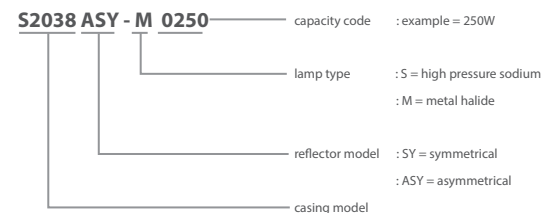

## order code

model	lamp type	lamp holder	carton dimension (L x W x H) mm	order code
S2038 SY MH 250W	tubular	E40	500 x 460 x 170	S2038 SY-M0250
S2038 SY MH 400W	tubular	E40	500 x 460 x 170	S2038 SY-M0400
S2038 SY HPS 250W	tubular	E40	500 x 460 x 170	S2038 SY-S0250
S2038 SY HPS 400W	tubular	E40	500 x 460 x 170	S2038 SY-S0400
S2038 ASY MH 250W	tubular	E40	500 x 460 x 170	S2038 ASY-M0250
S2038 ASY MH 400W	tubular	E40	500 x 460 x 170	S2038 ASY-M0400
S2038 ASY HPS 250W	tubular	E40	500 x 460 x 170	S2038 ASY-S0250
S2038 ASY HPS 400W	tubular	E40	500 x 460 x 170	S2038 ASY-S0400

• ASY - asymmetrical reflector • SY - symmetrical

note: Due to rapid change and continuous improvement in technology, all specifications are subject to change without prior notice to improve reliability, function or design in order to supply the best product possible.