

DS series highbay




features

- control gear housing**
 - high quality cold rolled steel with epoxy powder coating
 - power factor correction capacitor**
 - 100°C aluminium case self healing capacitor with overpressure break action mechanism
- reflector**
 - polycarbonate reflector for uniform light distribution
- polycarbonate diffuser**
 - optional diffuser can be mounted onto the reflector to give better luminance control
- others**
 - lamp holder and thermal resistant fibre glass wire

technical data


voltage • 220 - 240 Vac 50 / 60Hz
 lamp wattage • 70W - 400W
 holder type • E27 & E40
 colour of housing • light grey

photometric curve




note : photometric result tested based on 36000lm
 MH 400W coated bulb come with 22" PC reflector


accessories



dimension

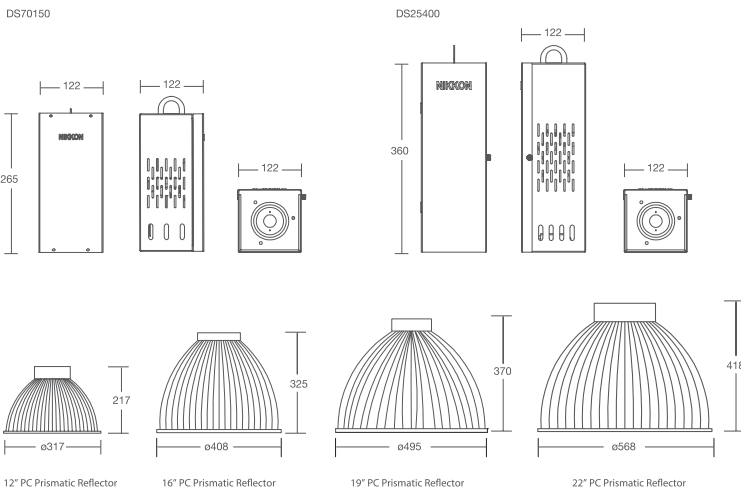

key for standard order coding

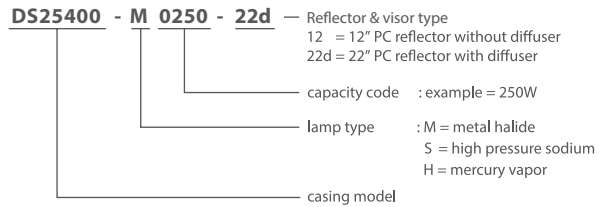

reflector & diffuser matching table

casing model	reflector type	lamp type												diffuser	order code	
		metal halide				high pressure sodium				mercury vapor						
		70W	150W	250W	400W	70W	150W	250W	400W	80W	125W	250W	400W			
DS70150	12" PC	√	√			√				√	√					DS70150
	16" PC			√		√	√					√		X		
	19" PC			√		√	√					√		√		
DS25400	22" PC			√			√					√		√		DS25400
	22" PC				√			√					√	X		

* others matching are available upon request • PC : polycarbonate

X : not matching √ : matching

note : Due to rapid change and continuous improvement in technology, all specifications are subject to change without prior notice to improve reliability, function or design in order to supply the best product possible.