

NL series lowbay



features

electrical system

- built-in control gear suitable for HID lamp from 70W - 400W with well ventilated control gear compartment

reflector

- high purity aluminium reflector with hammered/clear polished surface

glass

- thermal resistant tempered glass


others

- lamp holder and thermal resistant fibre glass wire

technical data

- voltage • 220 - 240 Vac 50 / 60Hz
- lamp wattage • 70W - 400W
- holder type • E27 / E40
- colour of housing • white


photometric curve



note : photometric result tested based on 19000lm MH 250W coated bulb

dimension

model	width	depth	height	opening hole
NL 150-RMS	400 mm	150 mm	400 mm	345 x 345 mm
NL 400-RMS	500 mm	230 mm	500 mm	420 x 420 mm
NL 150-SMS	345 mm	150 mm	345 mm	-
NL 400-SMS	420 mm	230 mm	420 mm	-
NL 150-SMR	250 mm	150 mm	430 mm	-
NL 400-SMR	320 mm	195 mm	600 mm	-

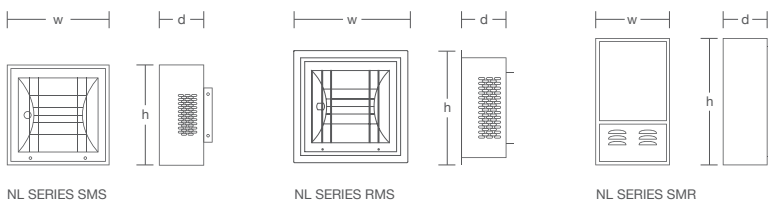

matching table

model	lamp type												carton dimension (L x W x H) mm
	metal halide				high pressure sodium				mercury vapor				
	70W	150W	250W	400W	70W	150W	250W	400W	80W	125W	250W	400W	
NL 150-RMS	√	√			√	√			√	√			420 x 420 x 210
NL 400-RMS			√	√			√	√			√	√	520 x 520 x 290
NL 150-SMS	√	√			√	√			√	√			356 x 351 x 220
NL 400-SMS			√	√			√	√			√	√	431 x 431 x 296
NL 150-SMR	√	√			√	√			√	√			450 x 270 x 230
NL 400-SMR			√	√			√	√			√	√	610 x 340 x 270

RMS : recessed mount square • SMS : surface mount square • SMR : surface mount rectangular

x : not matching √ : matching

note : Due to rapid change and continuous improvement in technology, all specifications are subject to change without prior notice to improve reliability, function or design in order to supply the best product possible.

key for standard order coding

NL400 RMS - M 0250

