

S3000



features

housing

- high pressure aluminium die-cast housing with AKzo Nobel Interpon outdoor epoxy powder coating

reflector

- high purity anodized hammered finish aluminium reflector

glass

- thermal resistant tempered glass

mounting bracket

- steel mounting bracket coated with epoxy powder

lamp holder

- E40 lamp holder conforming to EN / VDE standard

technical data

ingress protection • IP65 (lamp fitting)

voltage • 220 - 240 Vac 50 / 60Hz

lamp wattage • MH 1000W & HPS 1000W

holder type • E40


floodlight maximum weight • 11.6 kg

control gear maximum weight • S5100-M1000 : 14 kg / S5100-S1000 : 15.5 kg


colour of housing • black

accessories


S5100-UC




S5100-UA



dimension

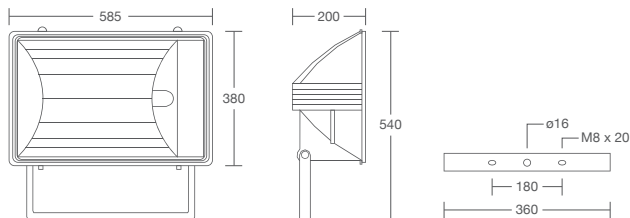

photometric curve

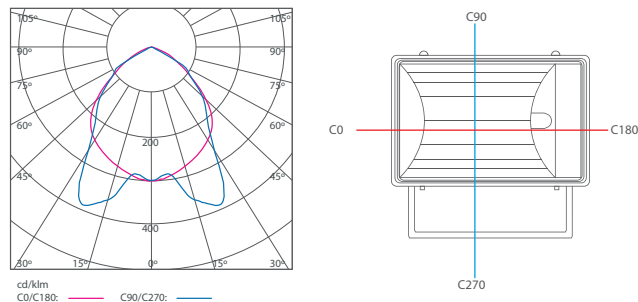

order code

model	lamp type	lamp holder	carton dimension (L x W x H) mm	order code
S3000 MH 1000W	tubular	E40	600 x 510 x 230	S3000-M1000
S3000 HPS 1000W	tubular	E40	600 x 510 x 230	S3000-S1000
accessories	housing material	IP rated	order code	
remote control gear (MH 1000W)	steel c/w epoxy powder	IP43	S5100 UC-M1000	
remote control gear (HPS 1000W)	steel c/w epoxy powder	IP43	S5100 UC-S1000	
remote control gear (MH 1000W)	die-cast aluminium	IP65	S5100 UA-M1000	
remote control gear (HPS 1000W)	die-cast aluminium	IP65	S5100 UA-S1000	

key for standard order coding

S3000 - S 1000 — capacity code : example = 1000W
 — lamp type : S = high pressure sodium
 : M = metal halide
 — casing model

note : Due to rapid change and continuous improvement in technology, all specifications are subject to change without prior notice to improve reliability, function or design in order to supply the best product possible.