

S4030

220 - 240V 50 / 60Hz E40



IP65



CE



features

housing

- high pressure aluminium die-cast housing with AKzo Nobel Interpon outdoor epoxy powder coating

reflector

- high purity anodized hammered finish aluminium reflector

glass

- frameless thermal resistant tempered glass

mounting bracket

- steel mounting bracket coated with epoxy powder

rear cover

- easy access to the lamp from rear without removing the front glass

lamp holder

- E40 lamp holder conforming to EN / VDE standard

technical data

ingress protection • IP65 (lamp fitting)

voltage • 220 - 240 Vac 50 / 60Hz

lamp wattage • MH 2000W



holder type • E40

floodlight maximum weight • 12 kg

control gear weight • 19.5 kg


colour of housing • black

photometric curve




note : photometric result tested based on 180000lm MH 2000W E40 clear tube

dimension

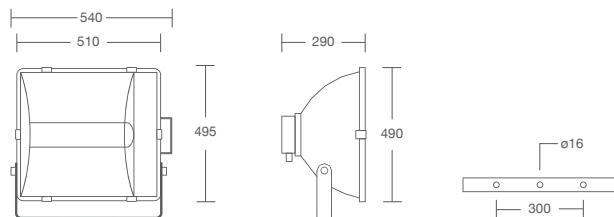

accessories

S5200-UA

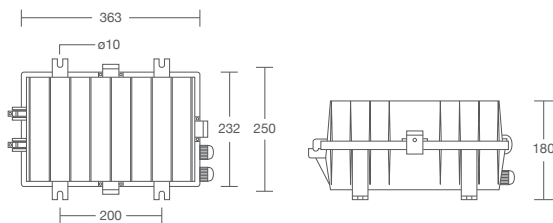

order code

key for standard order coding

S4030 - M 2000 ————— capacity code : example = 2000W
 ————— lamp type : M = metal halide
 ————— casing model

model	lamp type	lamp holder	carton dimension (L x W x H) mm	order code
S4030 MH 2000W	tubular	E40	620 x 540 x 310	S4030-M2000
accessories	housing material	IP rated	order code	
remote control gear	die-cast aluminium	IP65	S5200 UA-M2000	

* S4030 ASY 1000W is available upon request.

note : Due to rapid change and continuous improvement in technology, all specifications are subject to change without prior notice to improve reliability, function or design in order to supply the best product possible.