


SMS IP rated Lowbay

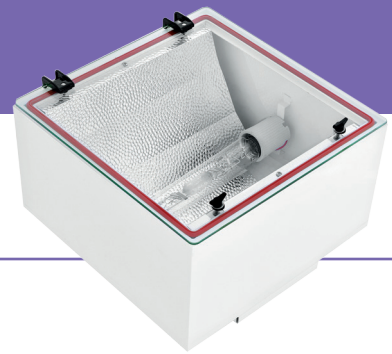


features:

- material**
- high quality cold rolled steel with epoxy powder coating
- electrical system**
- built – in control gear suitable for HID lamp from 250W – 400W
- reflector**
- high purity aluminium reflector with hammered surface
- glass**
- thermal resistant tempered glass
- gasket**
- high durability silicon gasket
- other**
- lamp holder and thermal resistant fibre glass wire

technical data


Ingress protection (IP) • IP 65
 voltage • 220 ~ 240 Vac 50 / 60Hz
 lamp wattage • 250 ~ 400W
 holder type • E40
 colour of housing • white

photometric curve




note : photometric result tested based on 36000lm MH 400W tubular

dimension

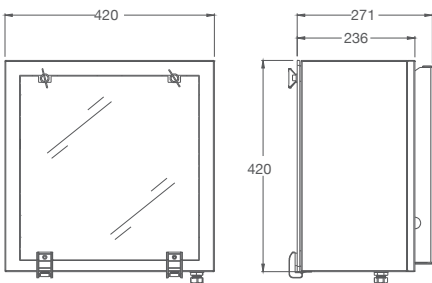

key for standard order coding

SMS IP LOWBAY - M 0400

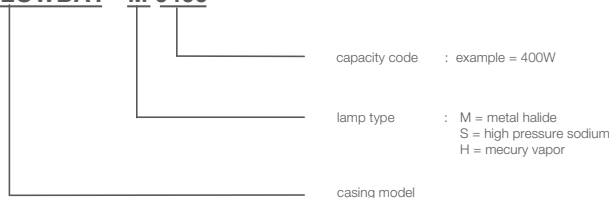

order code

casing model	lamp type	lamp holder	carton dimension (L x W x H) mm	order code
SMS IP Lowbay MH 250W	Tubular	E40	430 x 426 x 195	SMS IP Lowbay – M0250
SMS IP Lowbay MH 400W	Tubular	E40	430 x 426 x 195	SMS IP Lowbay – M0400
SMS IP Lowbay HPS 250W	Tubular	E40	430 x 426 x 195	SMS IP Lowbay – S0250
SMS IP Lowbay HPS 400W	Tubular	E40	430 x 426 x 195	SMS IP Lowbay – S0400
SMS IP Lowbay HPMV 250W	Bulb	E40	430 x 426 x 195	SMS IP Lowbay – H0250
SMS IP Lowbay HPMV 400W	Bulb	E40	430 x 426 x 195	SMS IP Lowbay – H0400

note : Due to rapid change and continuous improvement in technology, all specifications are subject to change without prior notice to improve reliability, function or design in order to supply the best product possible.