

IP65 remote control gear



features


housing

- high pressure aluminium die-cast housing with AKzo Nobel Interpon outdoor epoxy powder coating

technical data

- ingress protection • IP65
- voltage • 220 - 240 Vac 50 Hz / 60Hz
- lamp wattage • 1000W - 2000W
- colour of housing • black
- weight • MH 1000W - 14 kg
 - MH 2000W - 19.5 kg
 - HPS 1000W - 15.5 kg


dimension



S5100-UA - S5200-UA

key for standard order coding

S5200 U A -M 2000

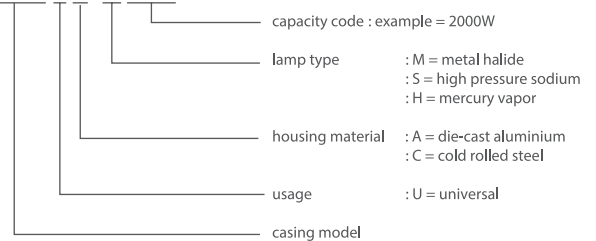

order code

model	lamp watt	lamp type	IP rated	carton dimension (L x W x H) mm	order code
S5100 - UA	1000W	MH / HPS / HPMV	IP65	410 x 285 x 205	S5100 - UA
S5150 - UA	1500W	MH	IP65	410 x 285 x 205	S5150 - UA
S5200 - UA	2000W	MH	IP65	410 x 285 x 205	S5200 - UA

note : Due to rapid change and continuous improvement in technology, all specifications are subject to change without prior notice to improve reliability, function or design in order to supply the best product possible.