


Ignitor (nylon casing)




features

- main voltage**
 - 220V - 240V 50Hz / 60Hz
- single point fixing**
 - nylon casing with M8 fastening
- maintenance free**
 - fully electronic control
- manufacturing standard**
 - MS IEC 61347-1:2003, MS IEC 61347-2-1:2003 & MS IEC 60927:2003
- accreditations and certifications**
 - international : CE marking
 - domestic : SIRIM

dimension

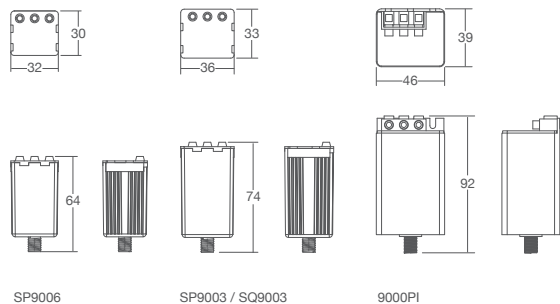

wiring diagram

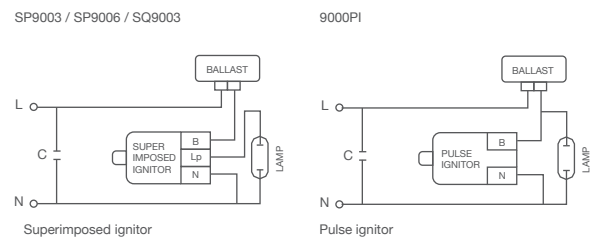

technical data

model	input voltage (V)	frequency	ignition voltage	max housing temperature	weight (kg)	min operating temperature
9000 PI	220 - 240	50/60Hz	4.0 - 5.0 KV	90°C	0.076	-30°C
SP 9003	220 - 240	50/60Hz	3.5 - 4.5 KV	85°C	0.130	-30°C
SP 9006	220 - 240	50/60Hz	3.5 - 3.8 KV	90°C	0.060	-30°C

for domestic market

model	input voltage (V)	frequency	ignition voltage	max housing temperature	weight (kg)	min operating temperature
SQ 9003	220 - 240	50/60Hz	3.5 - 4.5 KV	85°C	0.130	-30°C

order code

model	ignitor type	lamp type	carton dimension (L x W x H) mm	order code
9000PI	pulse	MH 250 - 2000W / HPS 150 - 1000W	300 x 220 x 115	9000PI
SP 9003	superimposed	MH / HPS 70W - 400W	260 x 190 x 200	SP 9003
SP 9006	superimposed	MH / HPS 70W - 150W	260 x 190 x 200	SP9006

for domestic market

order code

model	ignitor type	lamp type	carton dimension (L x W x H) mm	order code
SQ 9003	superimposed	MH / HPS 70W - 400W	260 x 190 x 200	SQ 9003

note : Due to rapid change and continuous improvement in technology, all specifications are subject to change without prior notice to improve reliability, function or design in order to supply the best product possible.