





12W ROUND SURFACE DOWNLIGHT

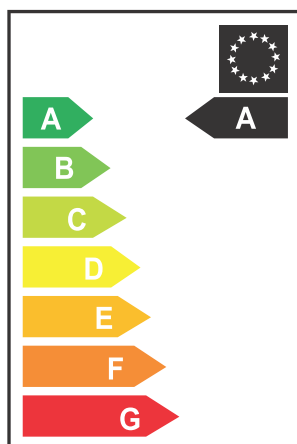

Diluluskan Oleh / Approved by:

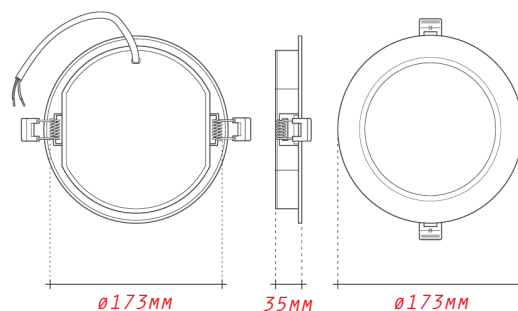

SPECIFICATION:

COLOUR | 6500K / 4000K / 3000K

LUMENS | 1080 LM

INPUT VOLTAGE | AC 220-240V 50-60HZ


BEAM ANGLE | 120°

RA | >80


POWER FACTOR | 0.5

IP RATING | IP20


LIFE TIME | 25000HR

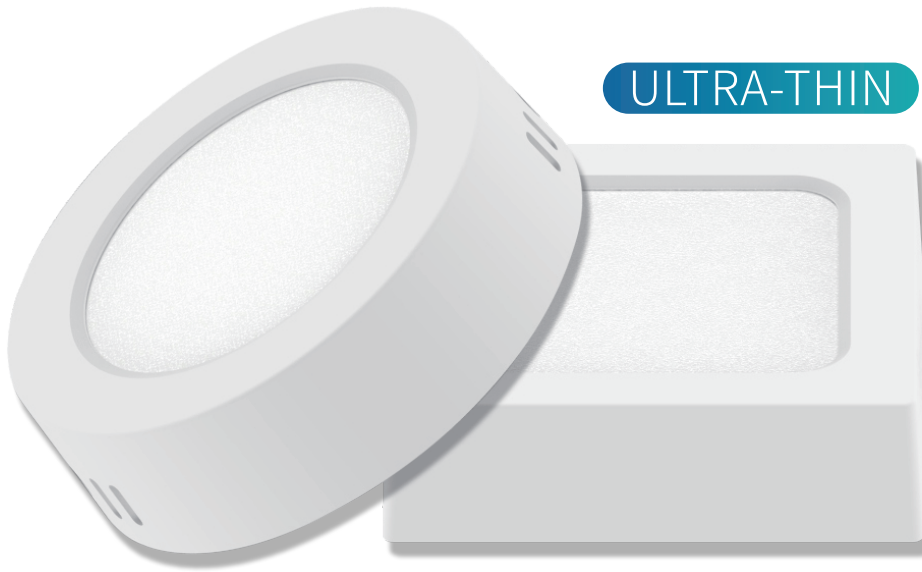

18W ROUND SURFACE DOWNLIGHT

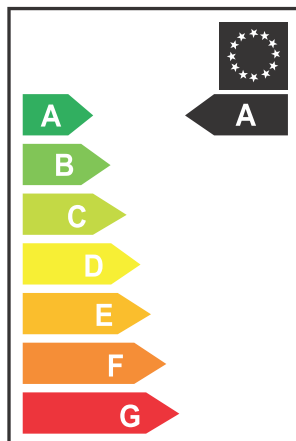

Diluluskan Oleh / Approved by:

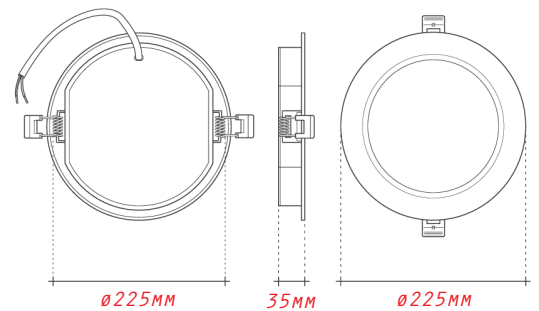

SPECIFICATION:

COLOUR | 6500K / 4000K / 3000K

LUMENS | 1620 LM

INPUT VOLTAGE | AC 220-240V 50-60HZ

BEAM ANGLE | 120°

RA | >80


POWER FACTOR | 0.5

IP RATING | IP20


LIFE TIME | 25000HR



24W ROUND SURFACE DOWNLIGHT

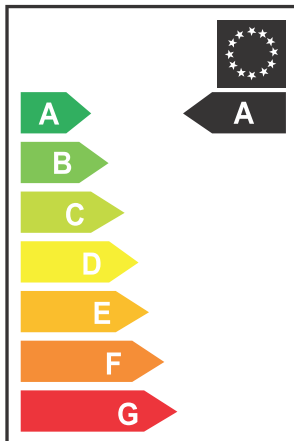

Diluluskan Oleh / Approved by:

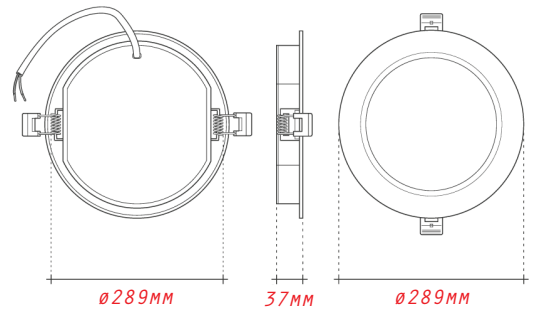

SPECIFICATION:

COLOUR | 6500K / 4000K / 3000K

LUMENS | 2160 LM

INPUT VOLTAGE | AC 220-240V 50-60HZ


BEAM ANGLE | 120°

RA | >80


POWER FACTOR | 0.5

IP RATING | IP20



LIFE TIME | 25000HR

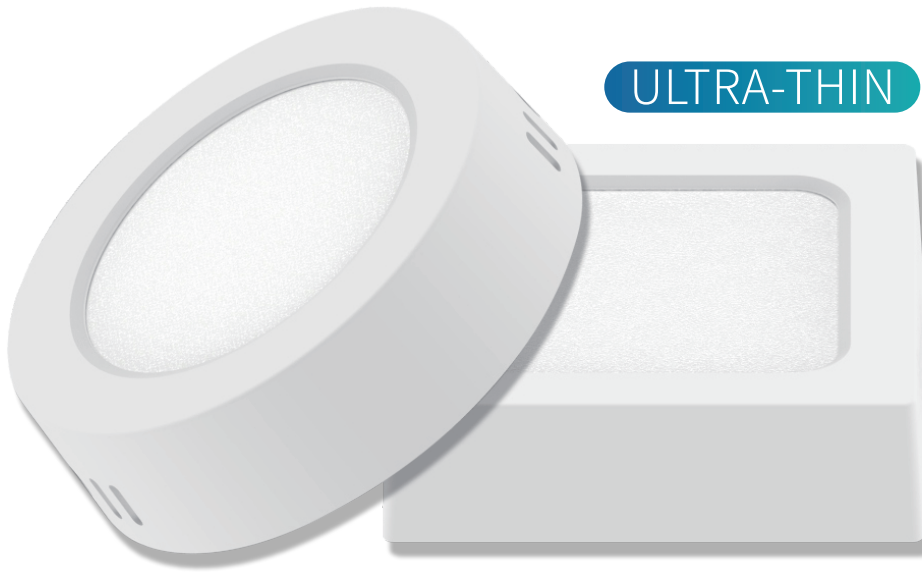

12W SQUARE SURFACE DOWNLIGHT

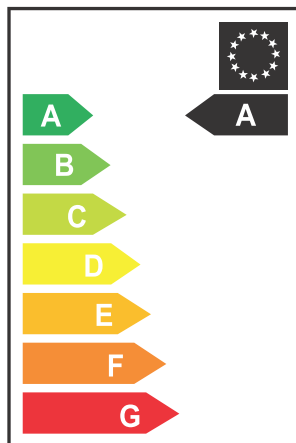

Diluluskan Oleh / Approved by:

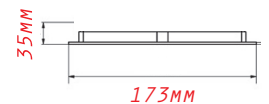

SPECIFICATION:

COLOUR | 6500K / 4000K / 3000K

LUMENS | 1080 LM

INPUT VOLTAGE | AC 220-240V 50-60HZ

BEAM ANGLE | 120°

RA | >80


POWER FACTOR | 0.5

IP RATING | IP20



LIFE TIME | 25000HR



18W SQUARE SURFACE DOWNLIGHT

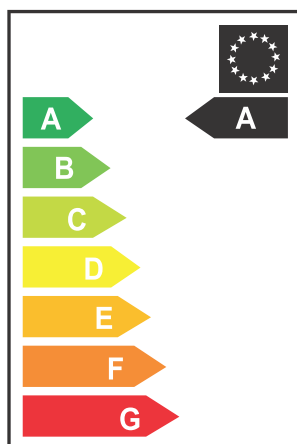

Diluluskan Oleh / Approved by:

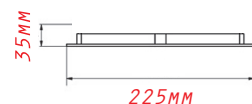

SPECIFICATION:

COLOUR | 6500K / 4000K / 3000K

LUMENS | 1620 LM

INPUT VOLTAGE | AC220-240V 50-60HZ

BEAM ANGLE | 120°

RA | >80


POWER FACTOR | 0.5

IP RATING | IP20



LIFE TIME | 25000HR



24W SQUARE SURFACE DOWNLIGHT

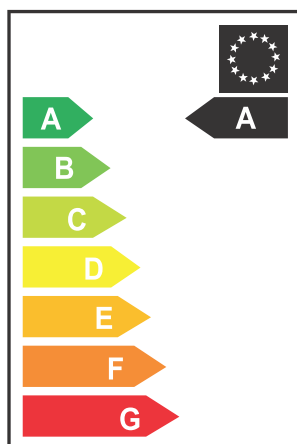

Diluluskan Oleh / Approved by:

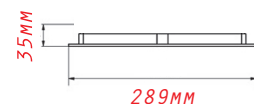

LED



SPECIFICATION:

COLOUR | 6500K / 4000K / 3000K

LUMENS | 2160 LM

INPUT VOLTAGE | AC 220-240V 50-60HZ

BEAM ANGLE | 120°

RA | >80

POWER FACTOR | 0.5

IP RATING | IP20

LIFE TIME | 25000HR