


Features

- *LED chip with high color rendering index
- *Ultra-thin optical lens design, light transmittance >90%
- *With PS diffuser plat, luminance uniformity and no lighting spot
- *Adopt high quality aluminum alloy main frame
- *With high reflectivity base plate
- *Designed with multiple installation methods

Applications

Ideal for housing, offices, classrooms, meeting rooms, supermarkets, corridors and etc.

Dimensional Drawing (mm)

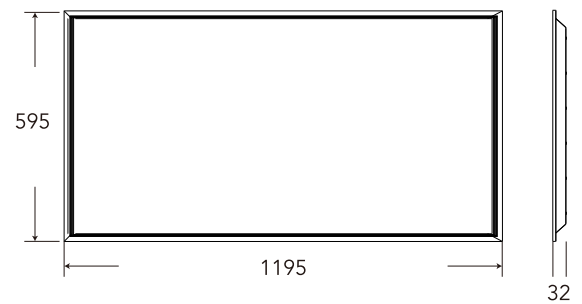

| MODEL | VOLTAGE (V) | POWER (W) | CCT (K) | LUMENS (lm) | CRI | PF | Cut-out (mm) | BEAM ANGLE | LIFE (Hrs) |
|-------------|-------------|-----------|----------------|-------------|-----|-----|--------------|------------|------------|
| FSP31612-80 | 180-265 | 80 | 3000/4000/6500 | 6840 | ≥80 | 0.9 | 585x1185 | 110° | 25000 |