



Product Code	Description
HC2792L-2	10A 2 Gang 2 Way Inter-Locking Switch with LED indicator



HC2792L-2-ST5



Product back view

Technical Specification

Rated Voltage: 250V 50/60Hz

Rated Current: 10AX

Recommended wire size:

1.5mm² - 2.5mm²

• Dimensions:

86 x 86 x 10mm (WxHxD)

• Fix Center: 60.3mm

• Fix Screw: M3.5 x 0.6 x 30mm±

• Mounting box: > 25mm

R1150, flush mounting, plastic (80 x 80 x 48.4mm) (WxHxD)

M1247, flush mounting, metal
(79 x 73 x 47mm) (WxHxD)

Comply to standards:


BS EN 60669-1

IEC 60669

GB/T 16915.1



Typical Connection Diagram

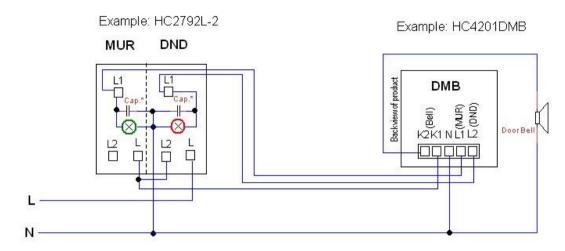

Cap.* - Add 0.15uF/0.22uF,275VAC X2-Safety Capacitor across LED indicator if there is residue voltage issue

Product Code	Colour	
HC2792L-2	White	
HC2792L-2-SBL	Matt Black (SBL)	
HC2792L-2-MSB	Matt Silver Black (MSB)	
HC2792L-2-PS7	Dark Champagne (PS7)	
HC2792L-2-ST5	Champagne Grey (ST5)	
For other colour, please contact T&J Sales representative		

