



| Product Code | Description |
|--------------|--|
| E2101L-2 | 20A 250V 1 Gang 2 Way Switch with Indicator IP66 |



E2101L-2



Product back view

Technical Specification

Rated Voltage: 250VAC, 50/60Hz

Rated Current: 20AX

SBL*: 250W

With indicator light (red LED)

Recommended wire size:
 4mm² - 6mm²

*SBL - Self Ballasted Lamp

- IP66 protected against dust and powerful water jets
- Dimensions: 83 x 83 x 68mm (WxHxD)
- Comply to standards:

BS EN 60669-1

IEC 60669-1

GB/T 16915.1


Switch Main Parts








Installation Method

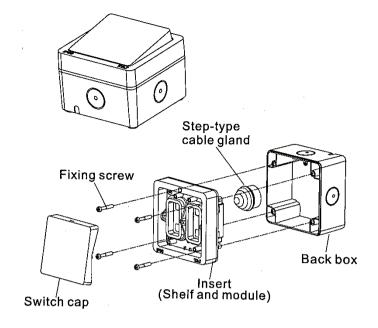

Typical 2-way Switch Connections


2-Way Switching Circuit (Control 1 lighting point from 2 switch locations)

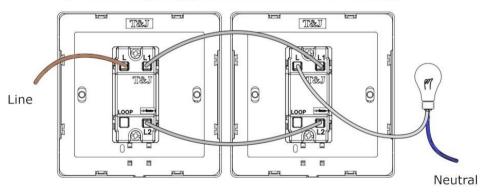

1 gang 2 way Switch

1 gang 2 way switch

2-way Switching with Dark-on indicator light*

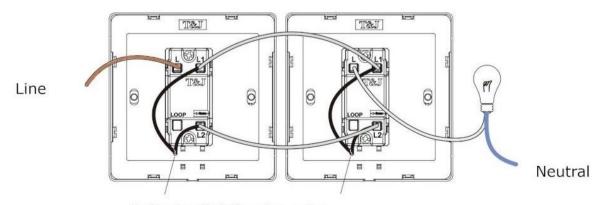

Indicator light's wire entry

^{*}This connection may not work for low wattage (<5W) LED lamp load, the lamp may appear dimly lighted even if switched off.