


Forecourt Under Canopy Downlight - FCL Series

FCL with luxeon LEDs offer optimum visual condition while enabling maximum energy savings for forecourt canopies light



AC Input: 90 ~ 305Vac
System Power: 70W +/-5W
Luminaire Efficacy Rating (LER): >130 lm/W
LED Driving Current: 1,100 mA
Luminous Flux (High Mode): 9,100 lm
Color Temperature: 5700k (available 3000k, 4000k)
Color Rendering Index (CRI): >70
Beam Angle: 120°
LED Lumen Maintenance: LM80
Electrical Safety: Class II
Compliant: IEC, CE, RoHS
Weight: 3.0kg
Heatsink material: Aluminium Extrusion
Luminaire Cover Material: Polycarbonate with UV
Size (L) x (W) x (H) : 1200mm x 140mm x 31.5mm

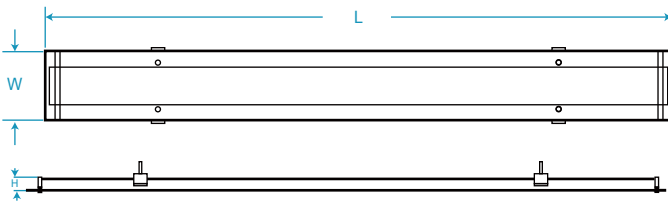

Application areas

- Service station canopies
- Multi purpose halls
- Workshops
- Workshops
- Factories
- Lobbies

