



LED Downlight - E Series

"E" Series LED Downlights provide accent lighting with good colour rendering and high uniformity, suitable for shelving lighting. These are directional lighting, basically functioning as low wattage spotlights commonly used in retail shops and showrooms.



AC Input: 220 ~ 240 Vac
Power Factor: >0.9
Forward Current: 300mA
Beam Angle: 36°
Luminous Efficacy: >100lm/W
Operating Temperature: -20°C ~ +40°C
Storage Temperature: -20°C ~ +80°C
LEDs: Citizen (Japan) / equivalent
Heatsink material: Aluminium
Fixture Material: Die Cast
Luminaire Cover Material: Glass
Lifetime (typical): 50,000 hrs @ Ta 25°C

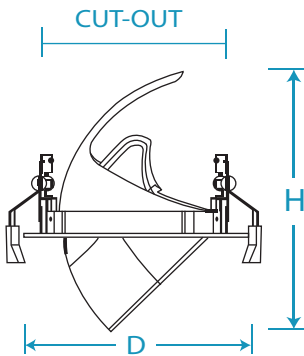

Application areas

-
-
-
-
-
-
-

Details	Model	DL-E3-F8	DL-E4-F12	DL-E5-F12	DL-E6-F30
System Power		8W	12W	20W	30W
Initial Lumens		800lm	1200lm	2000lm	3000lm
Size (D x H)		110mm x 108mm	145mm x 145mm	170mm x 160mm	190mm x 160mm
Cut Out Diameter (D)		95mm	130mm	155mm	175mm

