



LED Downlight - S Series

"S" series LED Downlights are designed for use as directional lighting with narrow beam angles and good colour rendering with high uniformity.



AC Input: 220 ~ 240 Vac
Power Factor: >0.9
Forward Current: 300mA
Beam Angle: 24°
Luminous Efficacy: >100lm/W
Operating Temperature: -20°C ~ +40°C
Storage Temperature: -20°C ~ +80°C
LEDs: Citizen (Japan) / equivalent
Heatsink material: Aluminium
Fixture Material: Die Cast
Luminaire Cover Material : Glass
Lifetime (typical): 50,000 hrs @ Ta 25°C

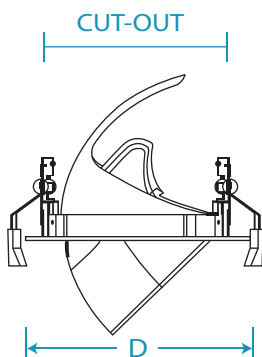

Application areas

-
-
-
-
-
-
-

Details	Model	S3	S5	S7	S9
System Power		10W	18W	24W	30W
Initial Lumens		1000lm	1800lm	2400lm	3000lm
Size(D)		110mm	140mm	160mm	180mm
Cut-Out Diameter		95mm	125mm	145mm	165mm

