



LED MiniTron 50W - Suitable for 7m or 10m height (15 deg or 30 deg)

NexusLED®
Simpler's Better

NexusLED Floodlights provide bright and even area lighting with maximum energy and cost savings - the least maintenance lighting solution.



AC Input: 100 ~ 240Vac
System Power: 50W +/-5W
Luminaire Efficacy Rating (LER): >100 lm/W
Luminous Flux (Initial Lumens): 5,000 lm
Beam Angle: 120°
Correlated Colour Temperature: 5700K (available in 3000K, 4000K)
Colour Rendering Index (CRI): >70
Operating Temperature: -20°C ~ +40°C
Storage Temperature: -20°C ~ +80°C
Lumen Maintenance: LM80
Electrical Safety: Class I
Compliant: IEC, SIRIM
Weight: 1.5kg
Heatsink material: Extruded Aluminium
Luminaire Cover Material: Clear Tempered Glass
Size (L)x(W)x(H): 189mmx156mmx77mm

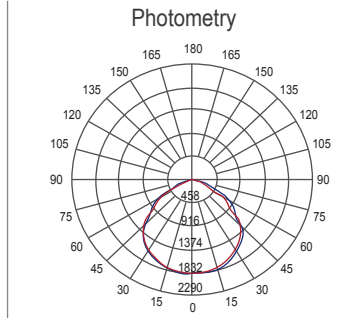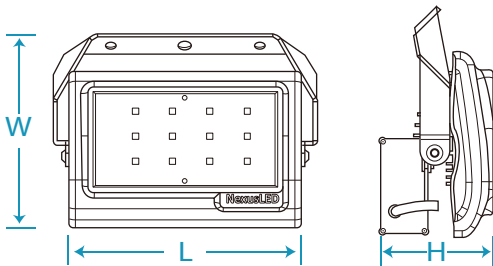

- Features**
- Available in various beam angles
 - Suitable for 7m or 10m height applications
- Application areas**
- Sign board lights
 - Area Lightings
 - Compound Lightings

