


# IMITOS LED EYEBALL

Quality aluminum radiator, the optimum thermal path, reducing chip operating temperatures  
Stylish, flexible architecture, rich lines for a variety of space



<b>EPISTAR</b>	<b>CRI</b> > 80Ra	<b>AC</b> 220-240V 50/60Hz	<b>24°</b>	<b>3000K</b>	<b>4000K</b>	<b>6000K</b>
----------------	----------------------	----------------------------------	------------	--------------	--------------	--------------

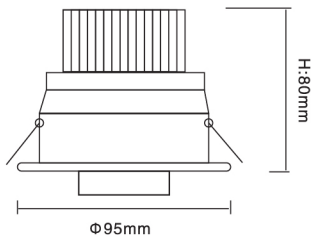


## ERD 05/WH/ 7W

LED EYEBALL

### Technical Parameters

- > Power : 7W
- > CCT : 3000K / 4000K / 6000K
- > LED Chip : EPISTAR
- > Power Factor : >0.9
- > Lifetime : 30000h
- > Beam Angle : 24°
- > CRI : >80Ra
- > Power Requirement : 220-240V 50/60Hz
- > Lumen : 600-650lm
- > Dimmable : No

### Photometric Diagram

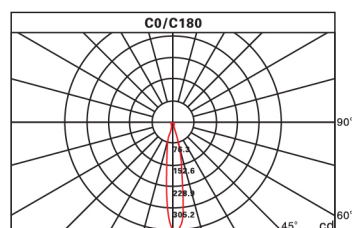

Height	Diameter	Lux
1.m	85.18cm	380.39 lx
2.m	130.35cm	95.10 lx
3.m	195.53cm	42.27 lx
4.m	260.71cm	23.77 lx
5.m	325.88cm	15.22 lx

\*All contents are for reference only\*