


IMITOS LED SURFACE DOWNLIGHT

Quality aluminum radiator, the optimum thermal path, reducing chip operating temperatures
Stylish, flexible architecture, rich lines for a variety of space

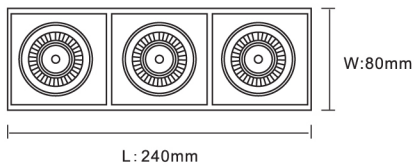

EPISTAR	CRI > 80Ra	AC 220-240V 50/60Hz	24°	3000K	4000K	6000K
---------	---------------	---------------------------	-----	-------	-------	-------

ESQ 83/3x7W


LED SURFACE DOWNLIGHT



Technical Parameters

- > Power : 3x7W
- > CCT : 3000K / 4000K / 6000K
- > LED Chip : EPISTAR
- > Power Factor : >0.9
- > Lifetime : 30000h
- > Beam Angle : 24°
- > CRI : >80Ra
- > Power Requirement : 220-240V 50/60Hz
- > Lumen : 3x600-650lm
- > Dimmable : No

Photometric Diagram

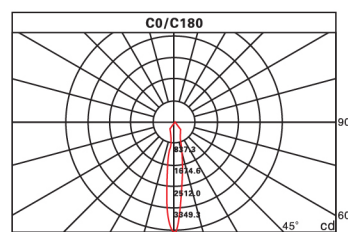

Lux-Distance Curve

Height	Beam Diameter	Beam Diameter
1.m	4173.97lx	31.68cm
2.m	1043.49 lx	63.35cm
3.m	463.77 lx	95.03cm
4.m	260.87lx	126.71cm
5.m	166.96 lx	158.38cm

Height
Beam Angle:24°

Diameter

All contents are for reference only