
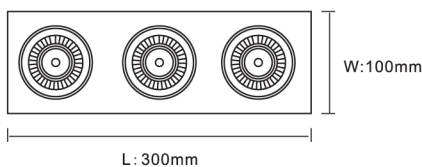


ORITZ LED SURFACE DOWNLIGHT

Quality aluminum radiator, the optimum thermal path, reducing chip operating temperatures
Stylish, flexible architecture, rich lines for a variety of space



ESQ 120/3x20W


LED SURFACE DOWNLIGHT



Technical Parameters

- > Power : 3x20W
- > CCT : 3000K / 4000K / 6000K
- > LED Chip : CREE
- > Power Factor : >0.9
- > Lifetime : 50000h
- > Beam Angle : 24°
- > CRI : >80Ra
- > Power Requirement : 220-240V 50/60Hz
- > Lumen : 3x1700-1900lm
- > Dimmable : No

Photometric Diagram



Height	Lux	Diameter
1.m	12219.97 lx	41.24cm
2.m	3054.99 lx	82.47cm
3.m	1357.77 lx	123.71cm
4.m	763.75 lx	164.94cm
5.m	488.80 lx	206.18cm

Height
Beam Angle: 24°

All contents are for reference only