


# IMITOS LED EYEBALL

Quality aluminum radiator, the optimum thermal path, reducing chip operating temperatures  
Stylish, flexible architecture, rich lines for a variety of space



<b>EPISTAR</b>	<b>CRI</b> <b>&gt; 80Ra</b>	<b>AC</b> <b>220-240V</b> 50/60Hz	<b>24°</b>	<b>3000K</b>	<b>4000K</b>	<b>6000K</b>
----------------	--------------------------------	---	------------	--------------	--------------	--------------

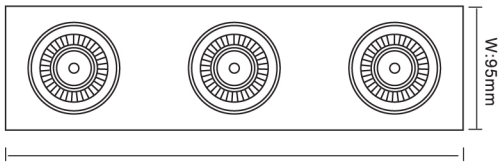

L : 260mm



245x80mm

## ESQ 165/3x7W


LED EYEBALL



### Technical Parameters

- > Power : 3x7W
- > CCT : 3000K / 4000K / 6000K
- > LED Chip : EPISTAR
- > Power Factor : >0.9
- > Lifetime : 30000h
- > Beam Angle : 24°
- > CRI : >80Ra
- > Power Requirement : 220-240V 50/60Hz
- > Lumen : 3x600-650lm
- > Dimmable : No

### Photometric Diagram

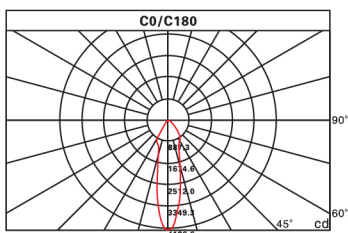

Height	Beam Diameter	Lux
1.m	31.68cm	4173.97 lx
2.m	63.35cm	1043.49 lx
3.m	95.03cm	463.77 lx
4.m	126.71cm	260.87 lx
5.m	158.38cm	166.96 lx

Height  
Beam Angle: 24°

\*All contents are for reference only\*