



IMITOS LED EYEBALL

Quality aluminum radiator, the optimum thermal path, reducing chip operating temperatures
Stylish, flexible architecture, rich lines for a variety of space

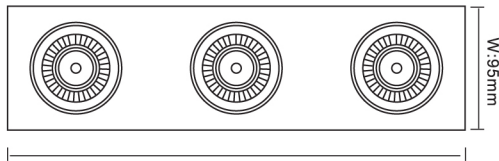

| | | | | | | |
|---------|---------------|---------------------------|-----|-------|-------|-------|
| EPISTAR | CRI > 80Ra | AC 220-240V 50/60Hz | 24° | 3000K | 4000K | 6000K |
|---------|---------------|---------------------------|-----|-------|-------|-------|



L : 260mm



245x80mm


ESQ 165 S/WH/ 3x7W

LED EYEBALL

Technical Parameters

- > Power : 3x7W
- > CCT : 3000K / 4000K / 6000K
- > LED Chip : EPISTAR
- > Power Factor : >0.9
- > Lifetime : 30000h
- > Beam Angle : 24°
- > CRI : >80Ra
- > Power Requirement : 220-240V 50/60Hz
- > Lumen : 3x600-650lm
- > Dimmable : No

Photometric Diagram



Lux-Distance Curve

| Height | Beam Diameter | Lux |
|--------|---------------|------------|
| 1.m | 31.60cm | 4173.97 lx |
| 2.m | 63.35cm | 1043.49 lx |
| 3.m | 95.03cm | 463.77 lx |
| 4.m | 126.71cm | 260.87 lx |
| 5.m | 153.38cm | 166.96 lx |

Height
Beam Angle: 24°

All contents are for reference only