


# IMITOS LED SURFACE SPOT LIGHT

Quality aluminum radiator, the optimum thermal path, reducing chip operating temperatures  
Stylish, flexible architecture, rich lines for a variety of space



EPISTAR	CRI > 80Ra	AC 220-240V 50/60Hz	24°	3000K	4000K	6000K
---------	---------------	---------------------------	-----	-------	-------	-------

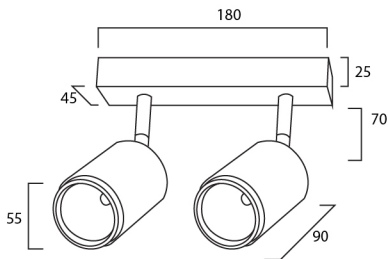

## SB 55/2x7W


LED SURFACE SPOTLIGHT



### Technical Parameters

- > Power : 2x7W
- > CCT : 3000K / 4000K / 6000K
- > LED Chip : EPISTAR
- > Power Factor : >0.9
- > Lifetime : 30000h
- > Beam Angle : 24°
- > CRI : >80Ra
- > Power Requirement : 220-240V 50/60Hz
- > Lumen : 2x700-800lm
- > Dimmable : No

### Photometric Diagram

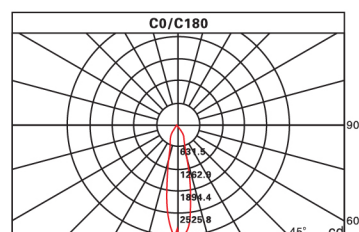

Height	Diameter	Lux
1.m	43.61cm	2886.42 lx
2.m	87.21cm	721.61 lx
3.m	130.82cm	320.71 lx
4.m	174.43cm	180.40 lx
5.m	218.04cm	116.46 lx

\*All contents are for reference only\*