

# ORITZ LED SURFACE SPOT LIGHT

Quality aluminum radiator, the optimum thermal path, reducing chip operating temperatures  
Stylish, flexible architecture, rich lines for a variety of space



CRI  
**> 80Ra**

AC  
**220-240V**  
 50/60Hz


**24°**

**3000K**

**4000K**

**6000K**

**Dimmable**

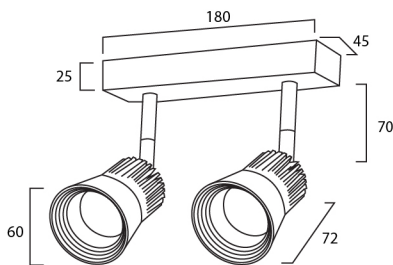

## SB C2/2x10W Dimmable


LED SURFACE SPOTLIGHT

**BLACK** **WHITE**

### Technical Parameters

- > Power : 2x10W
- > CCT : 3000K / 4000K / 6000K
- > LED Chip : CREE
- > Power Factor : >0.9
- > Lifetime : 50000h
- > Beam Angle : 24°
- > CRI : >80Ra
- > Power Requirement : 220-240V 50/60Hz
- > Lumen : 2x1000-1100lm
- > Dimmable : Yes

### Photometric Diagram

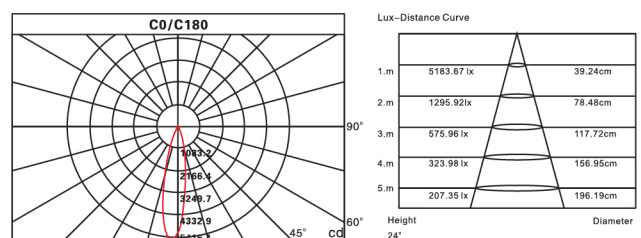

\*All contents are for reference only\*