



CEL-88 SURFACE TYPE
HIGH EFFICIENCY ENERGY CONSERVING
EMERGENCY LIGHTING LUMINAIRE




Technical Data

Mode of Operation	: Non-Maintained
Input Voltage	: 240V ± 10%, 50Hz
Battery	: 3.2V, 1500Mah, 4.8Wh, Environment Friendly Lithium-ion Battery
Lamp Used	: 8pcs x 0.15w LED
Operating Temperature	: 0°C to 60°C
Charger	: Constant Voltage and Constant Current Charging System. Fully Automatic Switch to Floating Mode Upon Full Charging.
Indication	: Red L.E.D. "On" Indicates Charging. Push Test-Switch to Simulate Power Failure.
Backup Time	: 3 Hours Duration.
Construction	: Injection Moulded Fire-Retardant ABS Polyester Casing
Weight	: ± 0.3kg
#Warranty	: Component (Warranty 5 Years) , Battery (Warranty 1 year)
Compliance	: Malaysia Standards MS-619-2-22:2055, MS IEC 60598-1:2012, IP20

Surface Mounting

Dimension in mm
Tolerance : ± 0.03mm

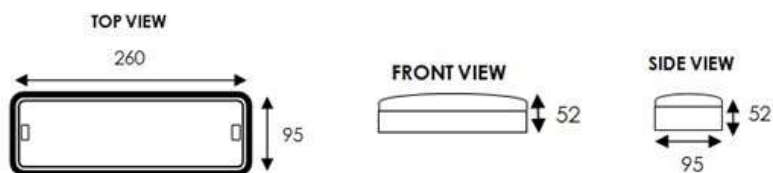

Recessed Mounting

